
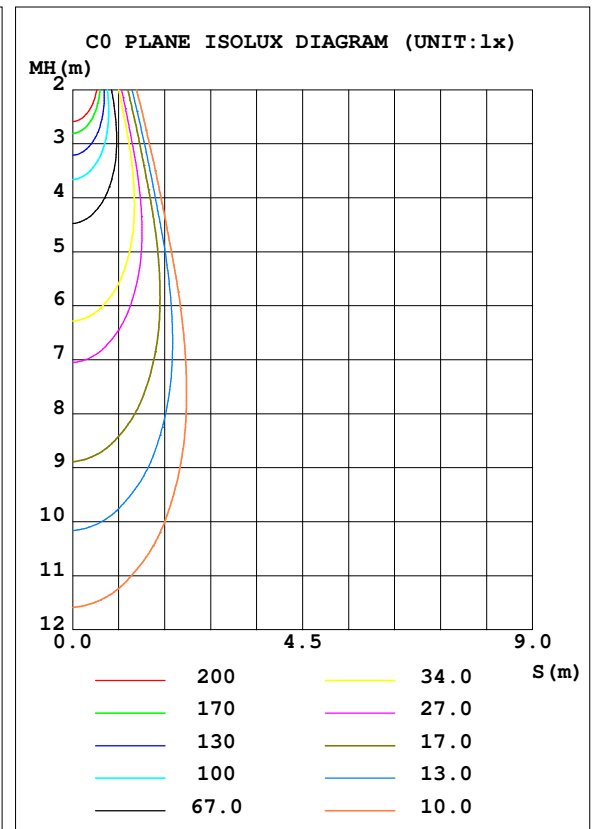


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.48V I:0.0254A P:5.7636W PF:0.9850 Freq:50.00Hz Lamp Flux:736.02x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.350 kg
SPEC.:4000K, LUMILED, CRI 70, BA - 40°	DIM.: 101 x 64 x 93	SERIAL No.:INT/2024/05/84C
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4266	Imax (cd)	1347	S/MH (C0/180)	0.55
NOMINAL POWER (W)	6	LOR (%)	65.2	S/MH (C90/270)	0.53
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	479.92	η UP, DN (C0-180)	0.0, 32.9
NOMINAL FLUX (lm)	736.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 32.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	65.2	CIBSE SHR MAX	0.55

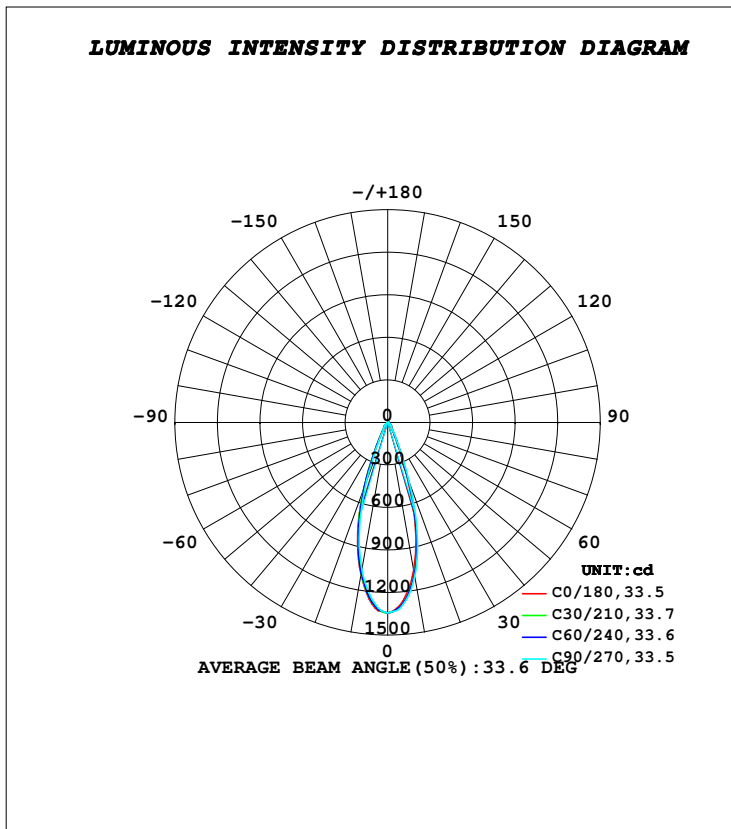

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.2DEG**  
**Operators: K-LITE**  
**Test Date: 11 June 2024**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 35.0%**  
**Test Distance: 1.997m [K=1.0000]**  
**Remarks:**

**APPLICABLE ID : KL-4265**