
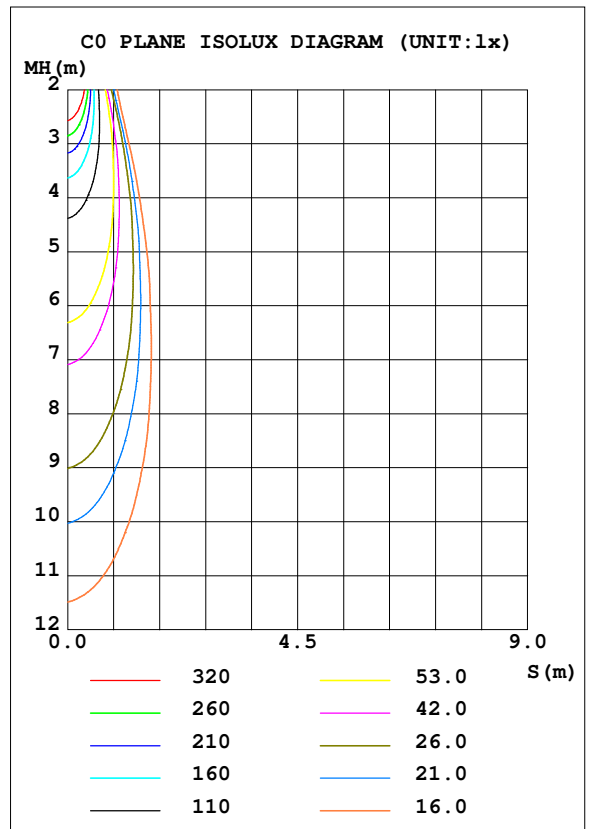


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.41V I:0.0257A P:5.8452W PF:0.9880 Freq:50.00Hz Lamp Flux:683.385x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.350Kg
SPEC.:2700K, LUMILED, CRI 70, BA - 25°	DIM.: 101 x 64 x 93	SERIAL No.:INT/2024/05/82B
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4266	Imax (cd)	2131	S/MH (C0/180)	0.43
NOMINAL POWER (W)	6	LOR (%)	69.2	S/MH (C90/270)	0.42
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	472.85	η UP, DN (C0-180)	0.0, 33.0
NOMINAL FLUX (lm)	683.385	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 36.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	69.2	CIBSE SHR MAX	1.00

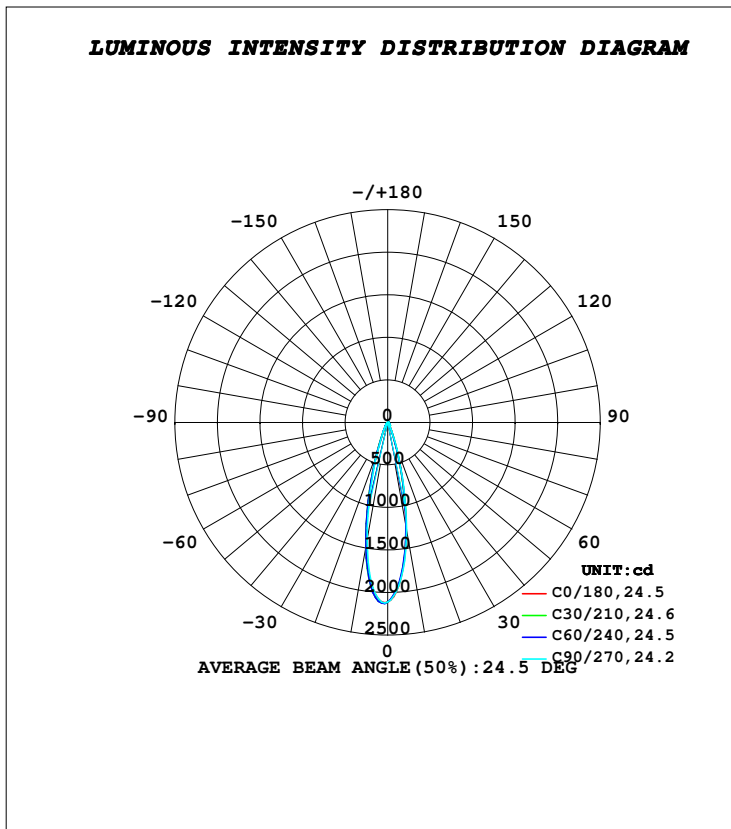

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.7DEG
Operators: K-LITE
Test Date: 17 August 2024

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 44.6%
Test Distance: 2.001m [K=1.0000]
Remarks:
APPLICABLE ID : KL-4265