
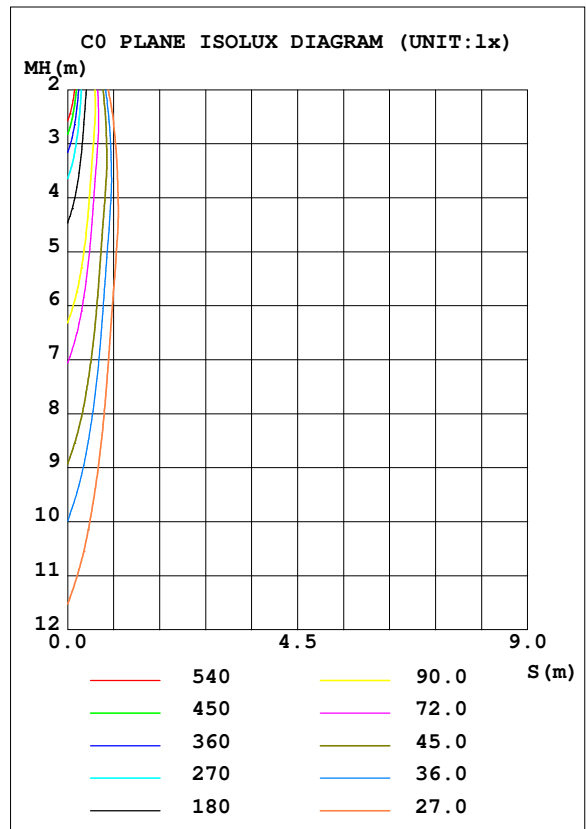


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.44V I:0.0267A P:6.0760W PF:0.9869 Freq:50.00Hz Lamp Flux:708.18x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.350 kg
SPEC.:3000K, LUMILED, CRI 70, BA - 15°	DIM.: 101 x 64 x 93	SERIAL No.:INT/2024/05/83A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4266	Imax (cd)	4210	S/MH (C0/180)	0.38
NOMINAL POWER (W)	6	LOR (%)	71.1	S/MH (C90/270)	0.26
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	503.39	η UP, DN (C0-180)	0.0, 34.8
NOMINAL FLUX (lm)	708.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 36.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	71.1	CIBSE SHR MAX	1.00

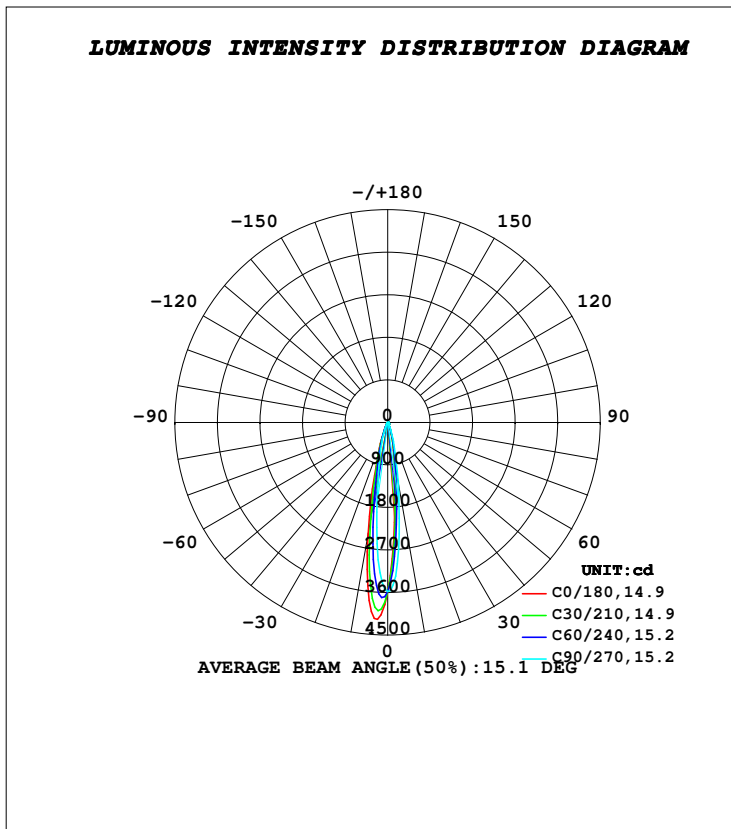

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.2DEG**  
**Operators: K-LITE**  
**Test Date: 24 June 2024**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 40.5%**  
**Test Distance: 2.000m [K=1.0000]**  
**Remarks:**

**APPLICABLE ID : KL-4265**