
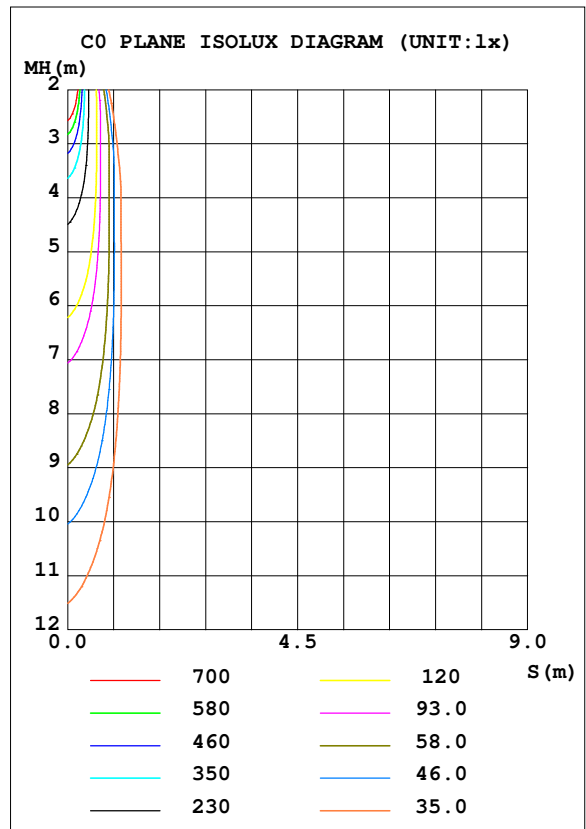


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.43V I:0.0253A P:5.7496W PF:0.9848 Freq:49.99Hz Lamp Flux:736.02x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.350 kg
SPEC.:4000K, LUMILED, CRI 70, BA - 15°	DIM.: 101 x 64 x 93	SERIAL No.:INT/2024/05/84A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4266	Imax (cd)	4694	S/MH (C0/180)	0.28
NOMINAL POWER (W)	6	LOR (%)	70.7	S/MH (C90/270)	0.27
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	520.71	η UP, DN (C0-180)	0.0, 34.8
NOMINAL FLUX (lm)	736.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 35.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	70.7	CIBSE SHR MAX	1.00

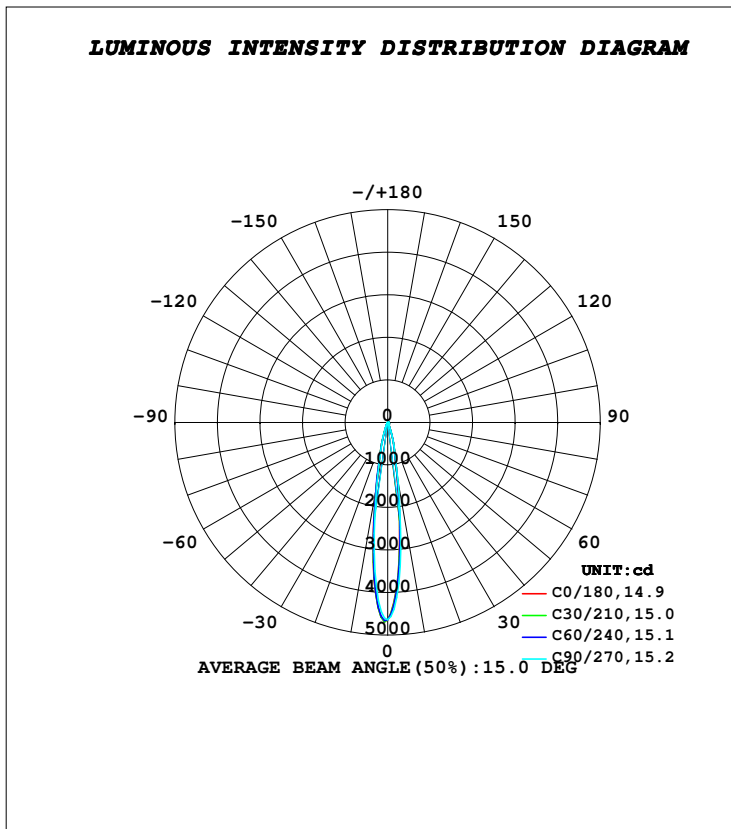

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: K-LITE
Test Date: 24 June 2024

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 34.9%
Test Distance: 2.000m [K=1.0000]
Remarks:

APPLICABLE ID : KL-4265