
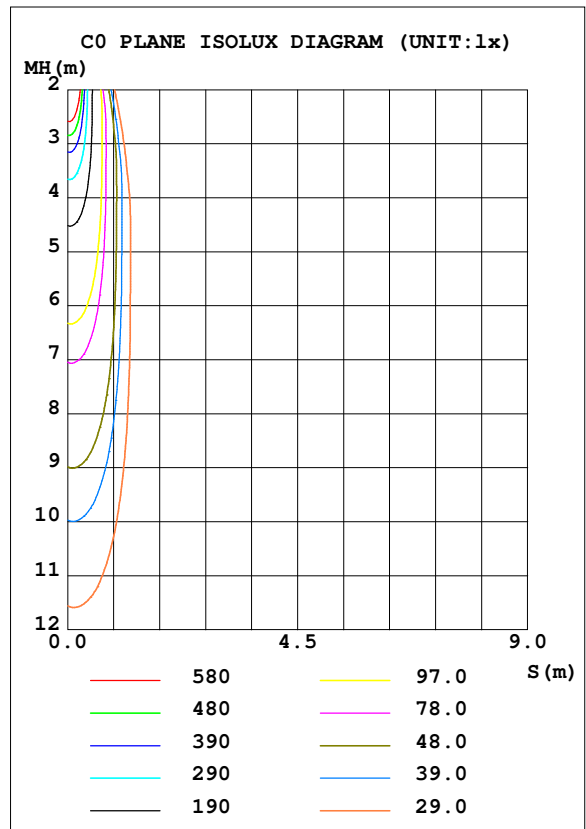


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.45V I:0.0263A P:5.9711W PF:0.9867 Freq:49.99Hz Lamp Flux:519.373x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.350 kg
SPEC.:5700K, LUMILED, CRI 70, BA - 15°	DIM.: 101 x 64 x 93	SERIAL No.:INT/2024/05/85A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.98 lm/W
MODEL	KL-4266	I _{max} (cd)	4197	S/MH (C0/180)	0.26	
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	0.20	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	519.37	η UP, DN (C0-180)	0.0, 59.4	
NOMINAL FLUX (lm)	519.373	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 40.6	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	1.00	

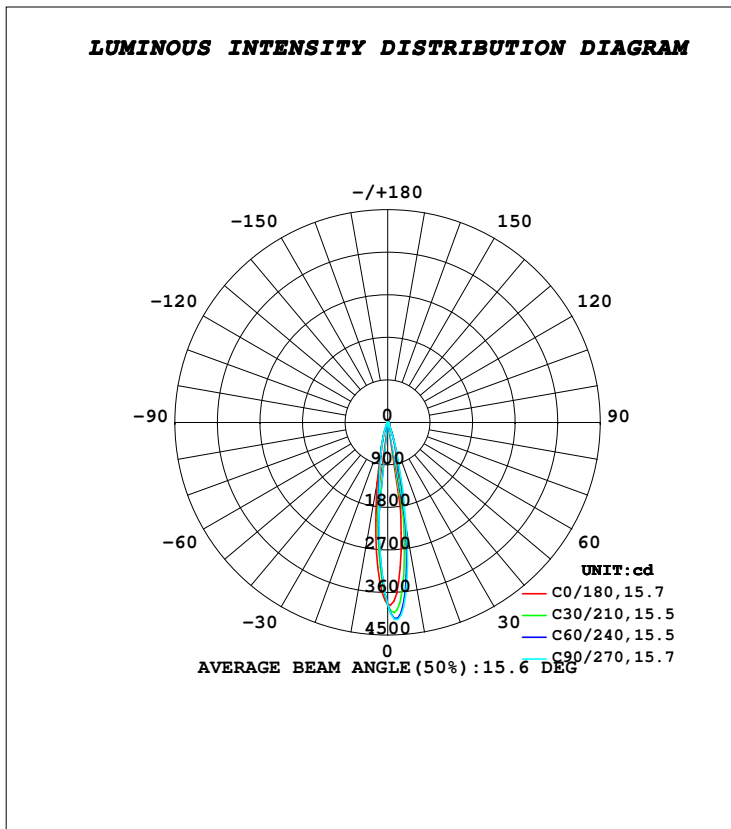

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.7DEG
Operators: K-LITE
Test Date: 24 June 2024

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 40.3%
Test Distance: 2.000m [K=1.0000]
Remarks:

APPLICABLE ID : KL-4265