


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.16V I:0.0989A P:17.177W PF:0.9102 Freq:49.99Hz Lamp Flux:1985.1x1 lm		
NAME: DIVA DEEP ROUND	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: CW, EPISTAR	DIM.: Ø148 x 50	SERIAL No.: 1054
MFR.: K-LITE	SUR.:	Shielding Angle: 120°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3322	Imax (cd)	771.9	S/MH (C0/180)	1.20
NOMINAL POWER (W)	18	LOR (%)	86.7	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1721.9	η UP, DN (C0-180)	0.0, 43.4
NOMINAL FLUX (lm)	1985.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 43.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	86.7	CIBSE SHR MAX	1.30

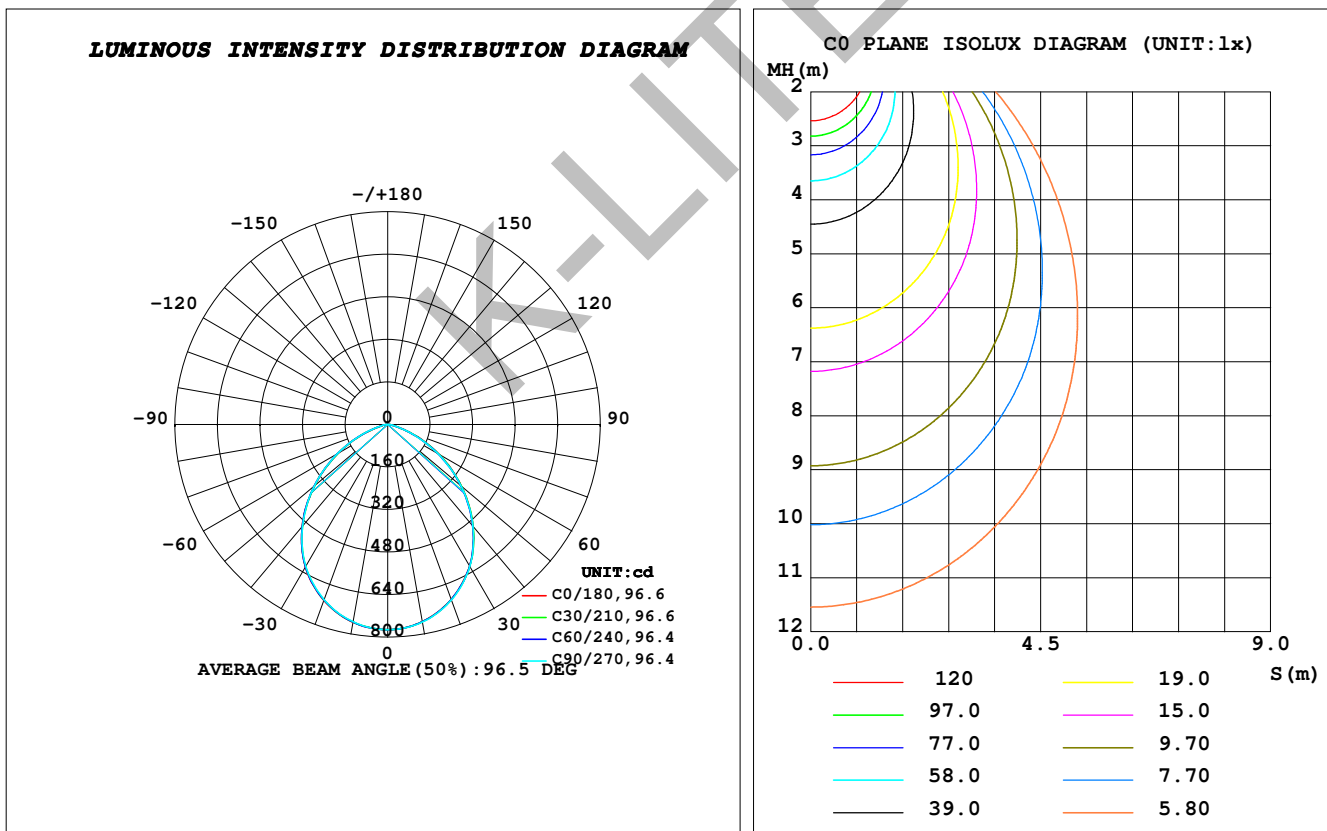

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 03 February 2020

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.825m [K=1.0000]  
 Remarks: