


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.51V I:0.0574A P:11.980W PF:0.9058 Freq:49.99Hz Lamp Flux:1250.9x1 lm		
NAME: DIVA DEEP SQUARE	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: NW, EPISTAR	DIM.: Sq.110 x 50	SERIAL No.: 1681
MFR.: K-LITE	SUR.:	Shielding Angle: 120°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3324	I _{max} (cd)	372.7	S/MH (C0/180)	1.24
NOMINAL POWER (W)	12	LOR (%)	68.3	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	854.77	η UP, DN (C0-180)	0.0, 34.3
NOMINAL FLUX (lm)	1250.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 34.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	68.3	CIBSE SHR MAX	1.35

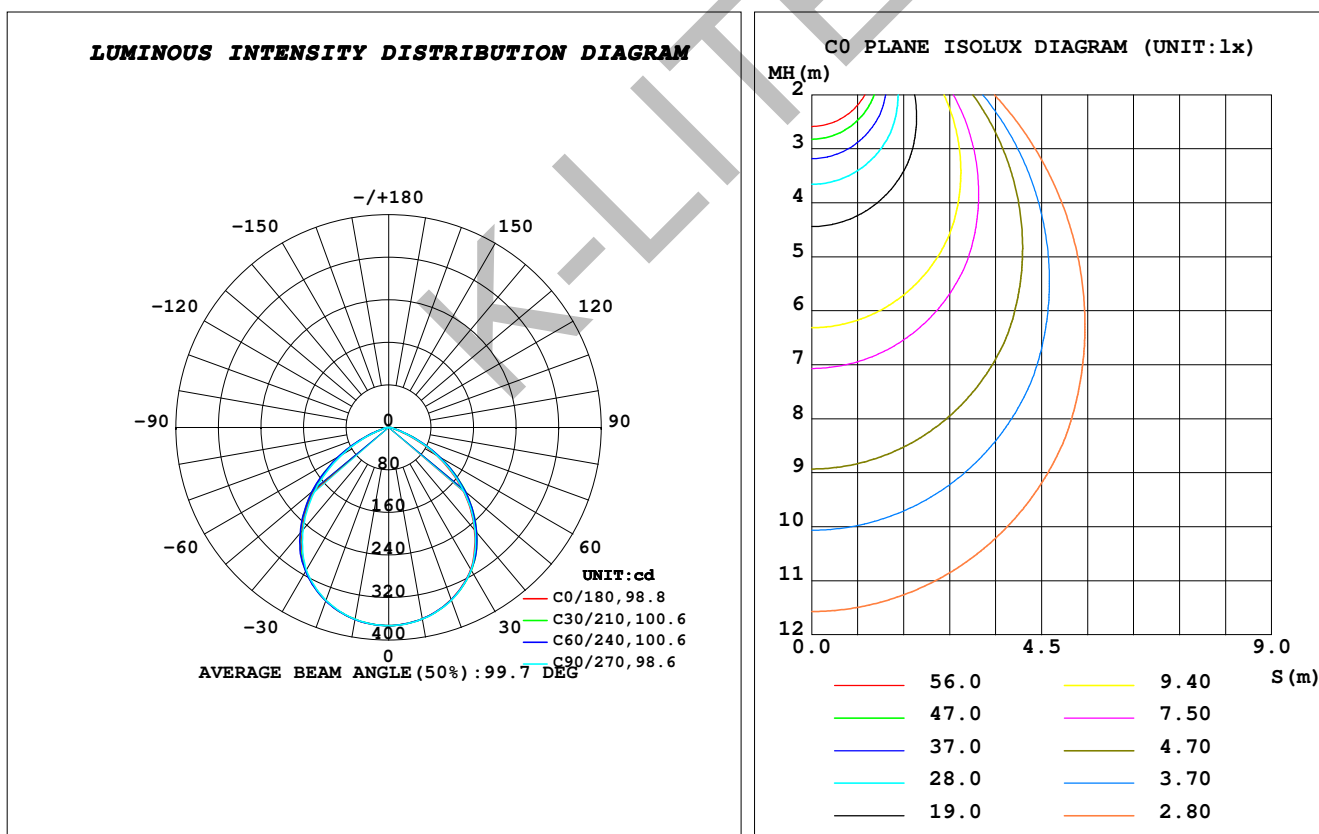

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 18 August 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: