


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.50V I:0.0864A P:17.862W PF:0.8972 Freq:49.98Hz Lamp Flux:1985.1x1 lm		
NAME: DIVA DEEP SQUARE	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: CW, EPISTAR	DIM.: Sq.143 x 50	SERIAL No.:1410
MFR.: K-LITE	SUR.:	Shielding Angle:120°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3325	Imax (cd)	771.9	S/MH (C0/180)	1.19
NOMINAL POWER (W)	18	LOR (%)	87.0	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1727.6	η UP, DN (C0-180)	0.0, 43.1
NOMINAL FLUX (lm)	1985.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 44.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	87.0	CIBSE SHR MAX	1.35

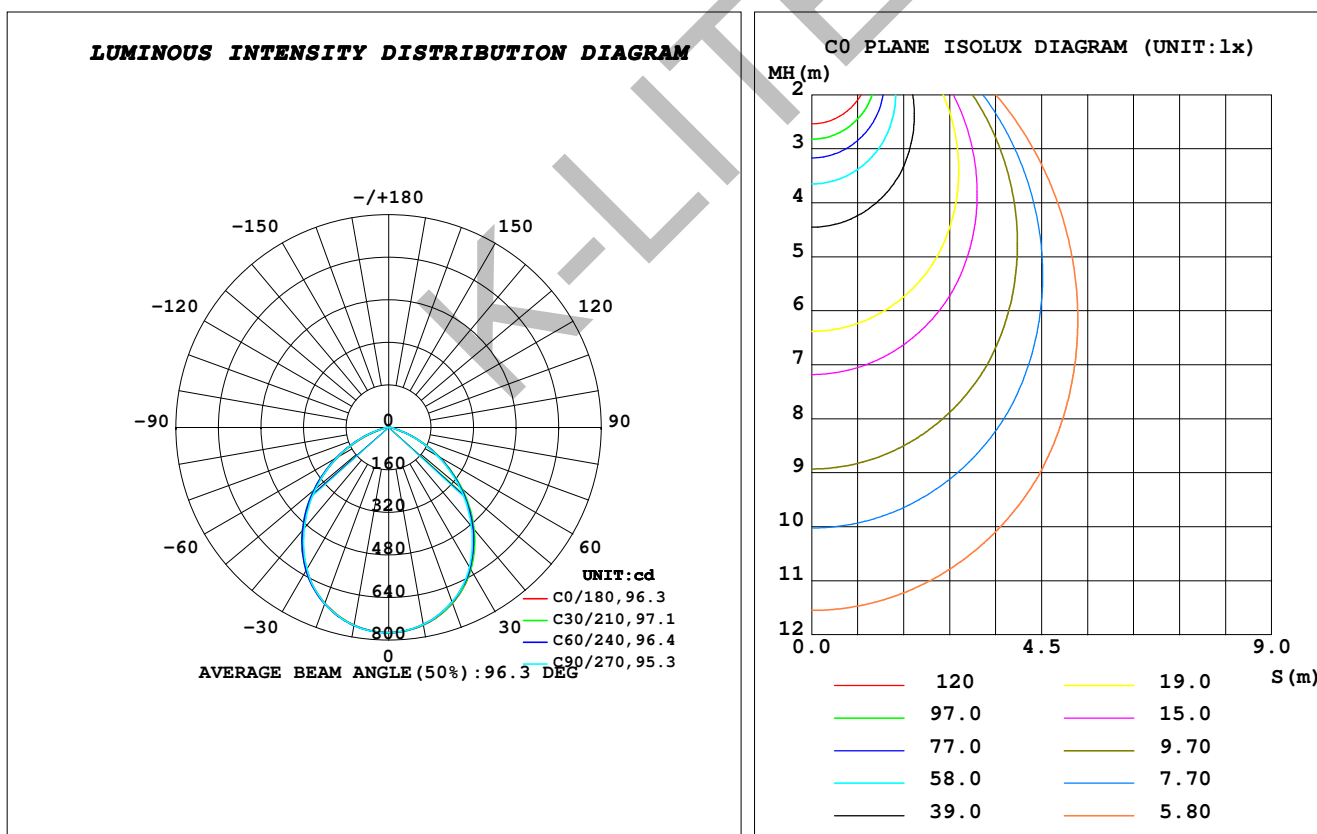

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 16 June 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: