



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.63V I:0.0850A P:8.8200W PF:0.4500 Freq:50.00Hz Lamp Flux:810x1 lm					
NAME: SLEEK PLATINA MINI		TYPE: RECESSED CEILING		WEIGHT:	
SPEC.: WW, CREE		DIM.: Ø44 x 100		SERIAL No.: 4479	
MFR.: K-LITE		SUR.:		Shielding Angle: 24°	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 49.76 lm/W
MODEL	KL-3339	I _{max} (cd)	2091	S/MH (C0/180)	0.42	
NOMINAL POWER (W)	10	LOR (%)	54.2	S/MH (C90/270)	0.45	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	438.89	η UP, DN (C0-180)	0.0, 24.0	
NOMINAL FLUX (lm)	810	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	54.2	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

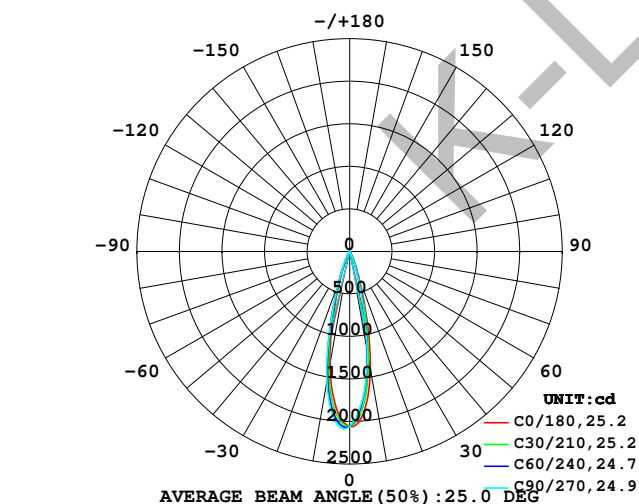

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

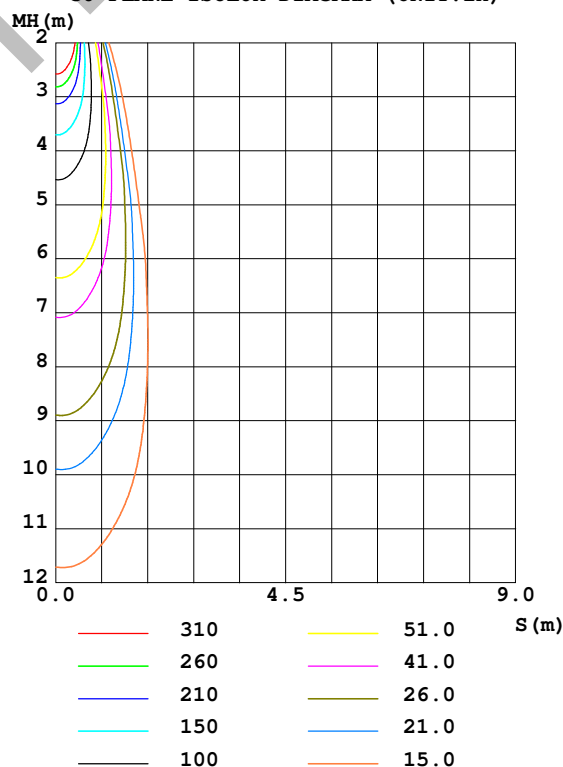

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 28 April 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: