


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.81V I:0.0440A P:9.7053W PF:0.9562 Freq:49.99Hz Lamp Flux:1074x1 lm		
NAME: LINE 'N' DOT - LINEAR DOWN LIGHT	TYPE:RECESSED CEILING	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 76 x 76 x 50	SERIAL No.:4599
MFR.: K-LITE	SUR.:	Shielding Angle:34°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3370	Imax (cd)	2326	S/MH (C0/180)	0.57
NOMINAL POWER (W)	10	LOR (%)	74.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	794.30	η UP, DN (C0-180)	0.0, 34.5
NOMINAL FLUX (lm)	1074	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 39.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	74.0	CIBSE SHR MAX	0.60

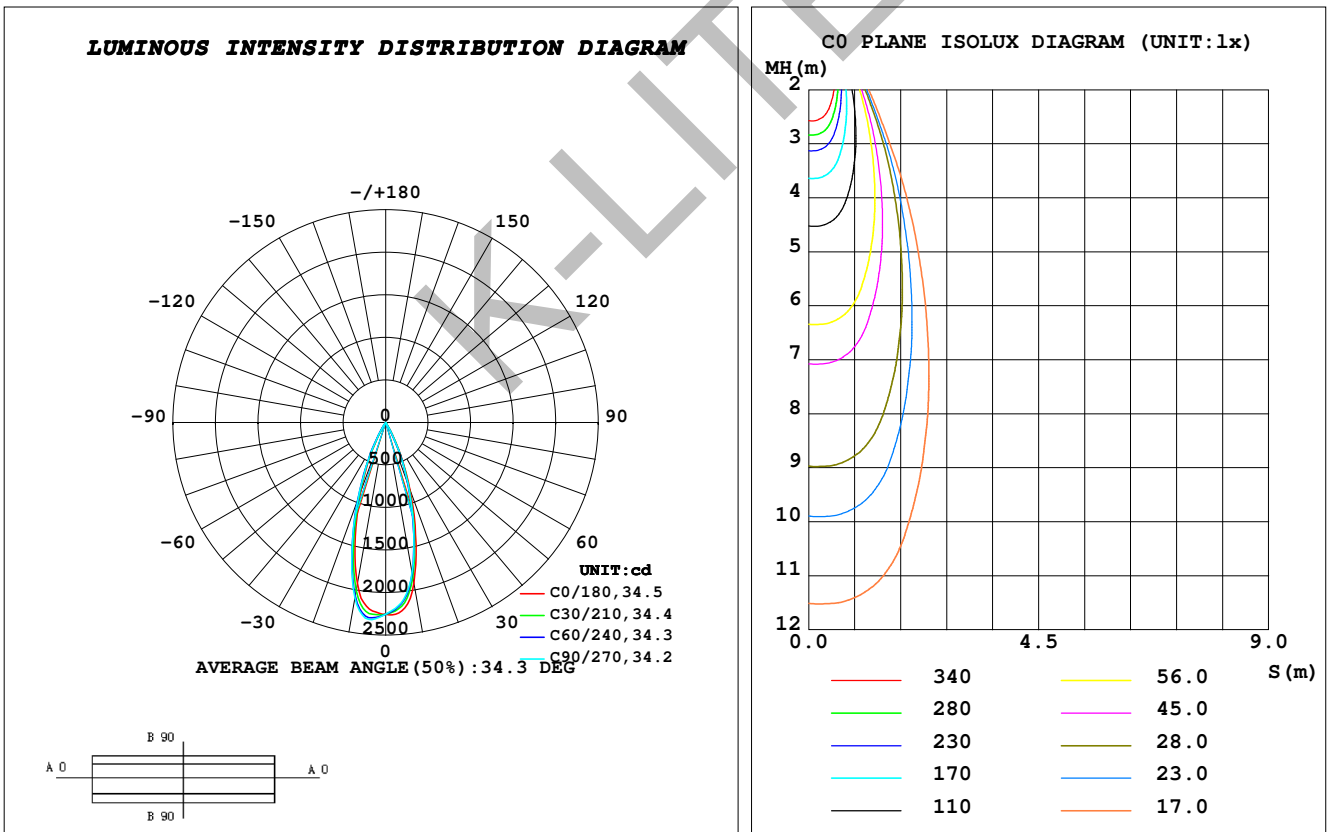

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 02 June 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: