


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.18V I:0.0367A P:7.3844W PF:0.8748 Freq:49.80Hz Lamp Flux:980x1 lm		
NAME: LINE N DOT - LINEAR WALL WASHER	TYPE:RECESSED CEILING	WEIGHT:0.180Kg
SPEC.:4000K, NICHIA, 80CRI	DIM.: 106 x 45.5 x 50	SERIAL No.:INT/2023/07/53
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 88.84 lm/W
MODEL	KL-3381	I _{max} (cd)	860.3	S/MH (C0/180)	0.85	
NOMINAL POWER (W)	6	LOR (%)	66.9	S/MH (C90/270)	0.48	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	656.03	η UP, DN (C0-180)	0.0, 47.0	
NOMINAL FLUX (lm)	980	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 19.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	66.9	CIBSE SHR MAX	1.00	

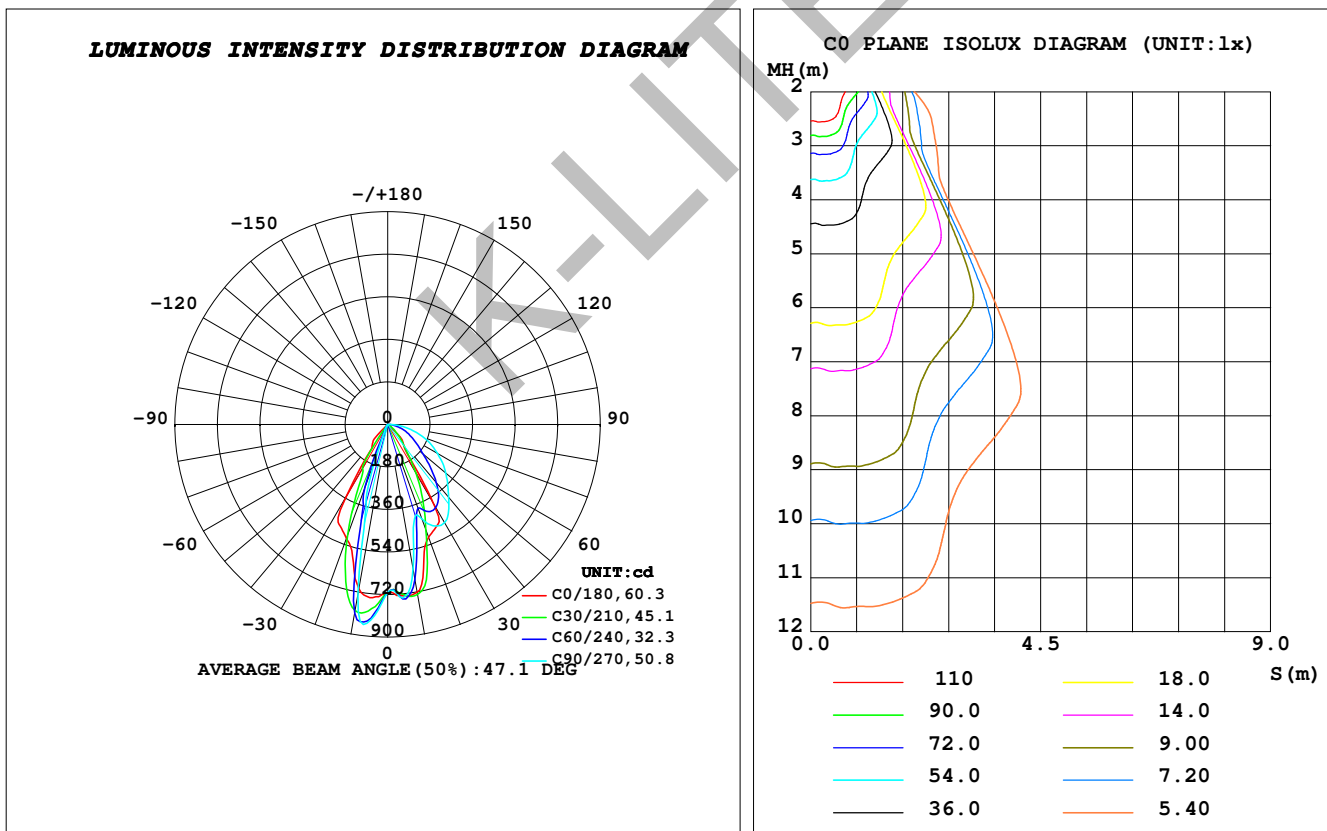

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.5DEG
Operators: K-LITE
Test Date: 21 July 2023

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 45.5%
Test Distance: 1.944m [K=1.0000]
Remarks: