



Technical Specifications

General

ID	: 21788
Product Wattage	: 120W
Driver Integrated	: Constant Current
Operating Voltage	: 198-264Vac
Operating Temperature	: -15°~+50°C

Physical

Body	: CRCA housing
Diffuser	: Satin Acrylic
Mounting	: Ceiling Surface / Pendant
Finish	: White epoxy polyester powder coating

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance

Optical Beam Angle	: 120°

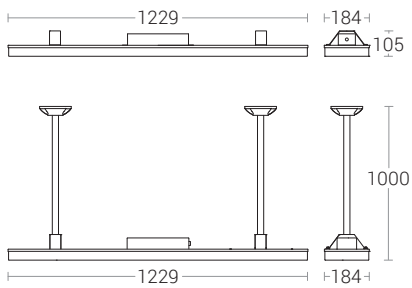

IP54 DALI 2

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**