K-LiTE

Astral 2.0





VEDVYAS TEMPLE, ROURKELA

Technical Specifications

General

ID	: 21804
System Wattage	: 30W Sym / Asy 50W Sym / Asy
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun aluminium top cover & Die cast aluminium base
Diffuser	: Clear acrylic
Mounting	: Suitable for 60mm OD pipe
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV / 6KV
Efficiency	: >85%

Optical Performance

Optical Distribution	: Sym / Type II, III, IV (Asy)

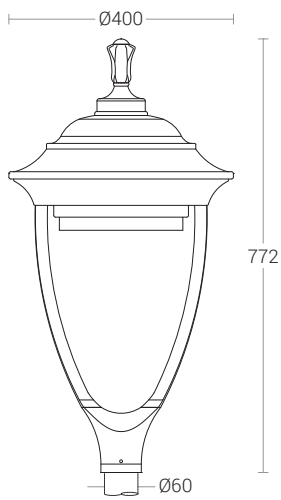

IP65 IK05

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**