
Power Graze

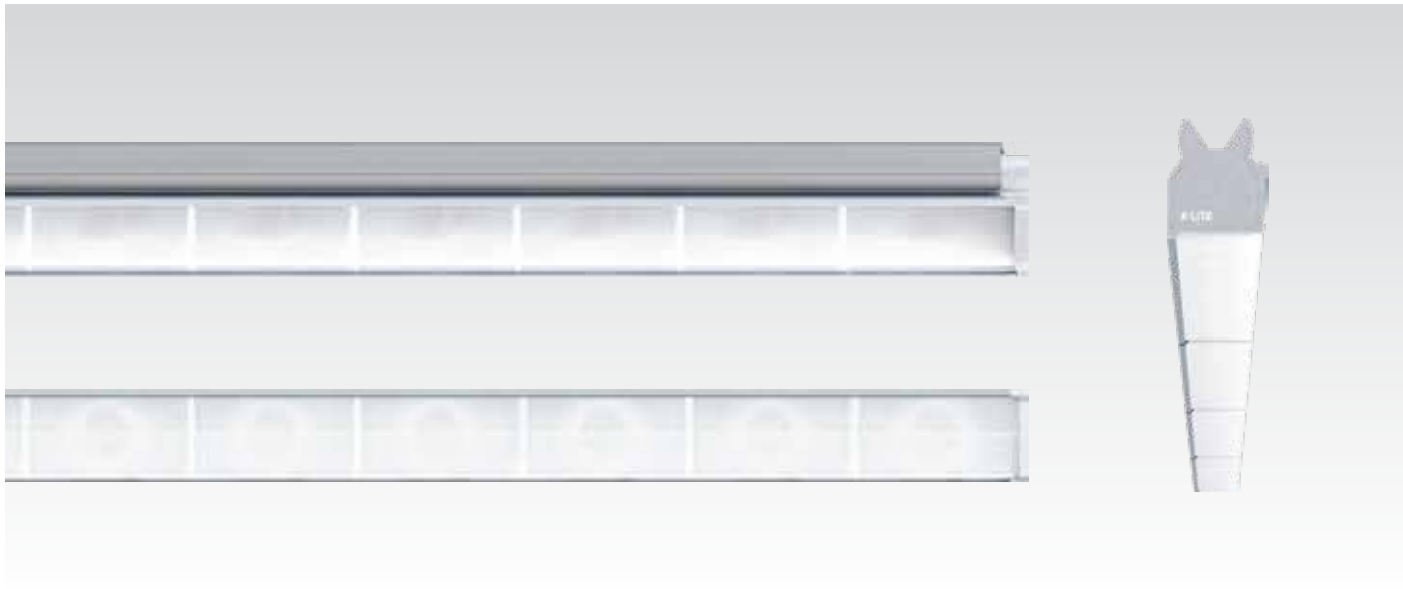

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Osram
CRI (Ra)	: >80
R9	: >50
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Optical

Tilt	: 10°
Optical Beam Angle	: 6°
Diffuser Material	: Polycarbonate
Secondary optics	: Elliptical Optical Polymer
UGR	: <19

Physical

Body	: Aluminium profile
Mounting	: Surface Mounted as continuous band of light
Diffuser	: Secondary optics made optical polymer
Fixing Clip	: Metal, Black powder coated

Driver

Power Supply	: Integral
Power Factor	: >0.9 - >0.97
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

IP44

Ordering Guide

Surface

ID	Wattage	Dimension (mm)
23384	Upto 18W	610 x 53 x 71
23384	Upto 36W	1210 x 53 x 71
23384	Upto 72W	2410 x 53 x 71