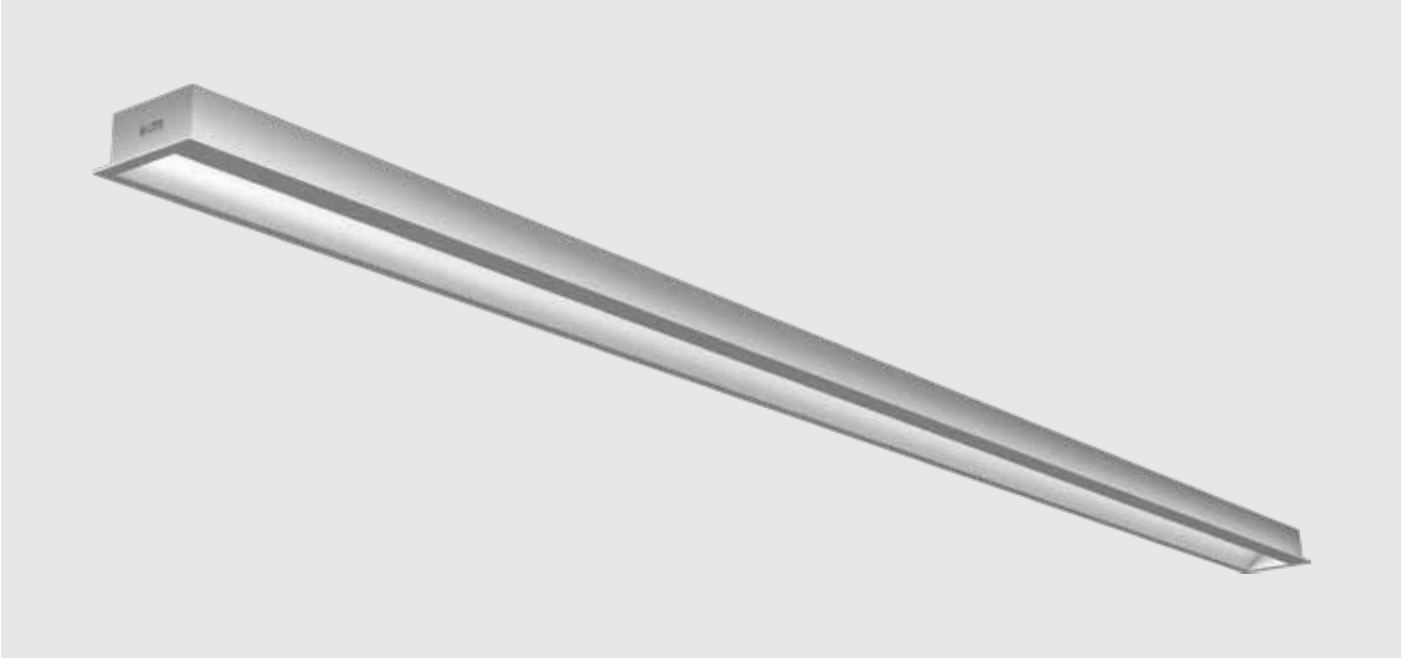


## Technical Specifications

### General

| | |
|---|---|
| Driver Integrated | : Constant Current |
| Input Voltage | : 220-240Vac |
| Operating Temperature | : -15°C~+50°C |

Light Source

| | |
|---|---|
| Light Source | : Bridgelux / Equivalent |
| CRI (Ra) | : >80 (>90 On Request) |
| LED Colour Temperature | : 2700K / 3000K / 4000K / 5700K |

### Optical

| | |
|---|---|
| Tilt | : Fixed |
| Beam Angle | : 115° |
| Diffuser Material | : PC Opal / PC Clear |
| UGR | : <19 |

### Physical

| | |
|---|---|
| Body | : Extruded Aluminium with Endcaps |
| Mounting | : Recess |
| Finish | : RAL 9004 Black<br>RAL 9016 Traffic White |

### Driver

| | |
|---|---|
| Power Supply | : Integrated |
| Power Factor | : >0.95 |
| THD | : <10% |
| Surge Protection | : Upto 3KV |
| Efficiency | : >85% |

IP44

## Ordering Guide

### Recess - Opal / Clear

| ID | Wattage | C.O.D | Dimension (mm) |
|---|---|---|---|
| 23394 | Upto 40W | 1205 x 50 | 1214 x 58 x 27 |
| 23394 | Upto 80W | 2391 x 50 | 2400 x 58 x 27 |