


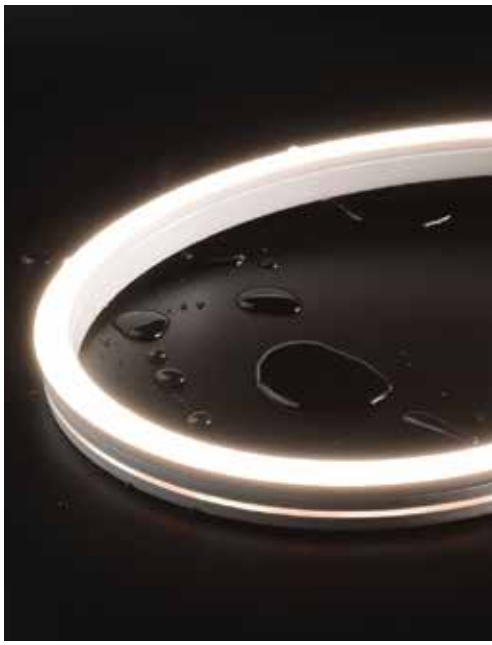

OPEN SOURCE

## Technical Specifications

### General

| | |
|---|---|
| ID | : 23397 |
| Minimum Bend Dia | : >150 mm |
| Driver Non-Integral | : Constant Voltage |
| Operating Voltage | : 24Vdc |
| Operating Temperature | : -25°C to 45°C |

### Physical

| | |
|---|---|
| Body | : Silicone - Side Bend |
| Mounting | : Aluminium Clamp |

### Light Source

| | |
|---|---|
| CRI (Ra) | : >90 |
| LED Life Time | : ≥50,000 Hours |


### Driver


| | |
|---|---|
| Power Supply | : Non - Integral |

### Optical Performance


| | |
|---|---|
| Optical Beam Angle | : 120° |

IP67 | IK10 | 24Vdc | DALI 2



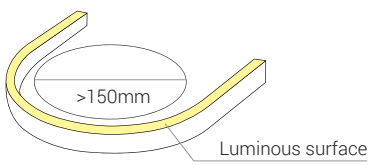
Min.Bending Diameter




### Mono Colour

| Wattage | CCT | Lumen (LM/M) | Efficiency(LM/W) | Unit length(mm) | Run length(M) |
|---|---|---|---|---|---|
| 10W/m | 3000K | 310 | 31.5 | 50 | 5 / 10 |

**Note :** Other CCT's available on request.

### On Request

#### Pixel RGBW - SPI

| Wattage | CCT | Lumen (LM/M) | Efficiency(LM/W) | Unit length(mm) | Max. Run length(M) | Pixel(PCS) |
|---|---|---|---|---|---|---|
| 14.5W/m | RGBW | 218 | 15.0 | 125 | 7 | 8 |

#### Pixel RGBW - DMX512

| Wattage | CCT | Lumen (LM/M) | Efficiency(LM/W) | Unit length(mm) | Max. Run length(M) | Pixel(PCS) |
|---|---|---|---|---|---|---|
| 15W/m | RGBW | 211 | 14.1 | 125 | 7 | 8 |