


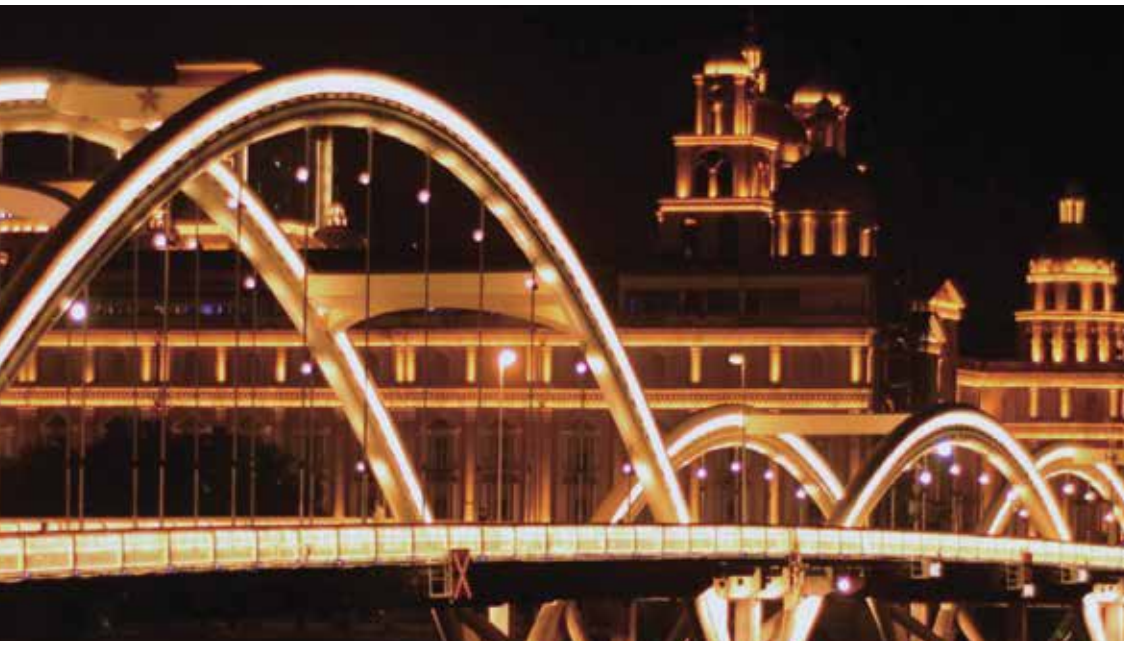

Technical Specifications

General

ID	: 23398
Minimum Bend Dia	: ≥200 mm
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -25°C to 45°C

Physical

Body	: Silicone - Top Bend
Mounting	: Aluminium Clamp

Light Source

CRI (Ra)	: >90
LED Life Time	: ≥50,000 Hours


Driver

Power Supply	: Non - Integral


Optical Performance

Optical Beam Angle	: 120°

CE | III | IP67 | IK10 | 24Vdc | DALI 2

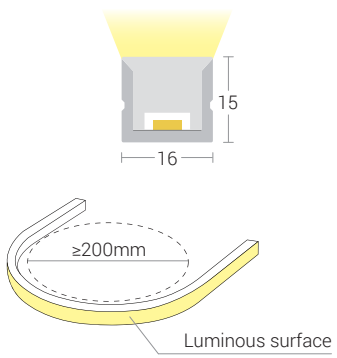

Min.Bending Diameter



Mono Colour

Wattage	CCT	Lumen (LM/M)	Efficiency(LM/W)	Unit length(mm)	Run length(M)
10W/m	3000K	540	54	50	5 / 10

Note : Other CCT's available on request.

On Request

Pixel RGBW - SPI

Wattage	CCT	Lumen (LM/M)	Efficiency(LM/W)	Unit length(mm)	Max. Run length(M)	Pixel(PCS)
14.5W/m	RGBW	342	23.6	125	7	8

Pixel RGBW - DMX512

Wattage	CCT	Lumen (LM/M)	Efficiency(LM/W)	Unit length(mm)	Max. Run length(M)	Pixel(PCS)
15W/m	RGBW	329	21.9	125	7	8