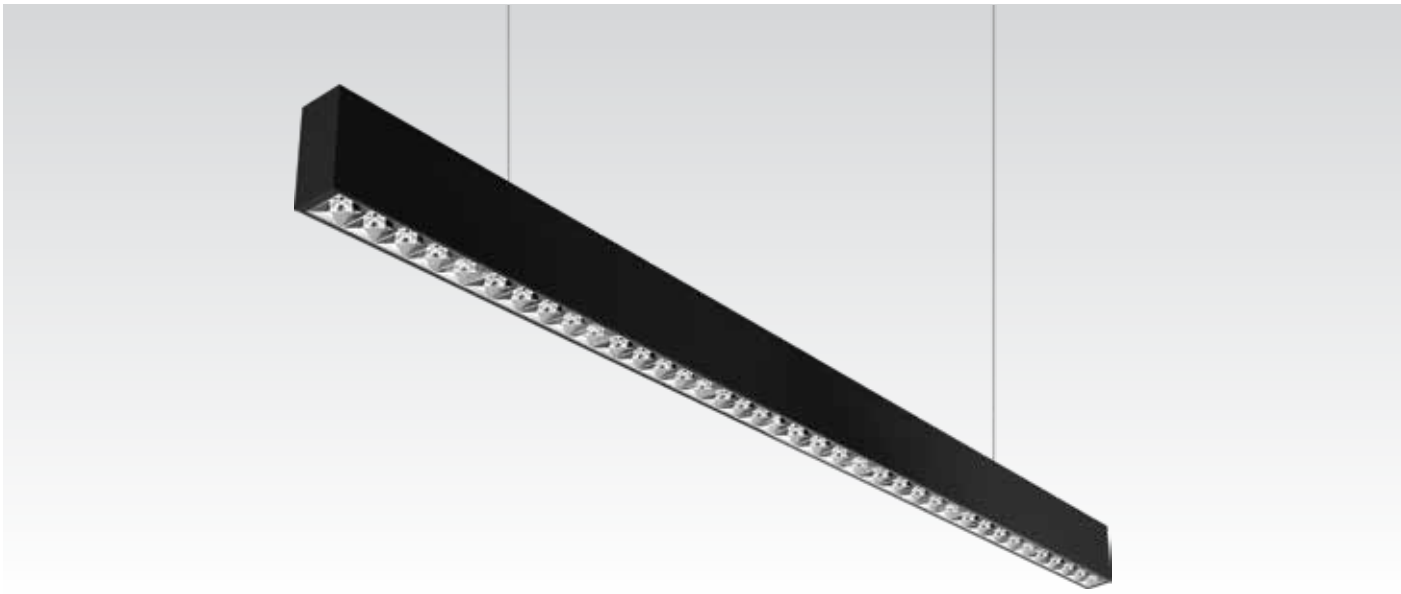


## Technical Specifications

### General

| | |
|---|---|
| Driver | : Constant Current |
| Input Voltage | : 220-240Vac |
| Operating Temperature | : -15°C~+50°C |

### Light Source

| | |
|---|---|
| Light Source | : Nichia |
| CRI (Ra) | : >80 (>90 On Request) |
| LED Colour Temperature | : 2700K / 3000K / 4000K 5700K |

### Optical

| | |
|---|---|
| Efficiency | : >90% |
| Tilt | : Fixed |
| Optical Beam Angle | : 12°,20°,34°,48°,60° |
| Diffuser/Lens Material | : Polycarbonate |
| Secondary Reflector | : Vaccum Metalized Chrome Finish |
| UGR | : <12 |

### Physical

| | |
|---|---|
| Body | : Extruded Aluminium with Die-cast Endcaps |
| Mounting | : Surface / Pendant |
| Finish | : RAL 9004 Black<br>RAL 9016 Traffic White |

### Driver

| | |
|---|---|
| Power Supply | : Integral |
| Power Factor | : >0.90 |
| THD | : <10% |
| Surge Protection | : 3KV |
| Efficiency | : >85% |

IP40

## Ordering Guide

### Pendant - Direct / Surface

| ID | Wattage | Dimension (mm) |
|---|---|---|
| 23469 | Upto 20W | 612 x 36 x 75 |
| 23469 | Upto 40W | 1212 x 36 x 75 |
| 23469 | Upto 80W | 2412 x 36 x 75 |

### Pendant - Direct-Indirect

| ID | Wattage | Dimension (mm) |
|---|---|---|
| 23469 | Upto 20W & 8W | 612 x 36 x 75 |
| 23469 | Upto 40W & 15W | 1212 x 36 x 75 |
| 23469 | Upto 80W & 30W | 2412 x 36 x 75 |