
K-LITE

# Bema 7



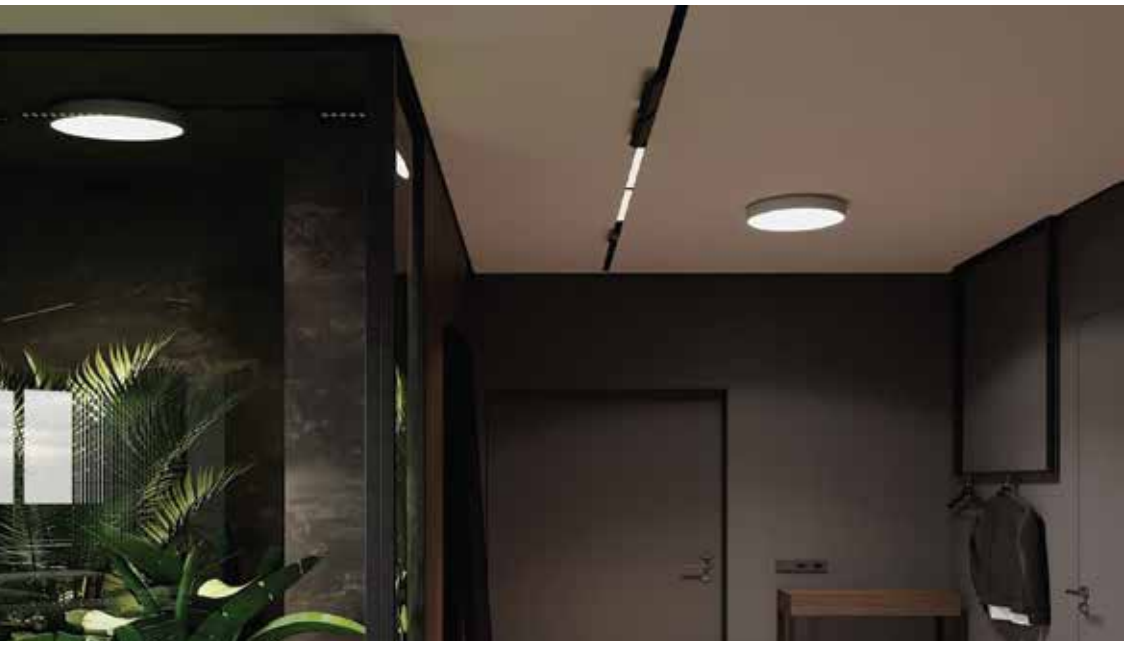

## Technical Specifications

### General

| | |
|---|---|
| ID | : 23614 |
| System Wattage | : 32W |
| Driver Integral | : Constant Current |
| Operating Voltage | : 90-265Vac |
| Operating Temperature | : -15°C~+50°C |

### Physical

| | |
|---|---|
| Body | : Die-Cast Aluminium |
| Diffuser | : Translucent Polystyrene |
| Mounting | : Ceiling Surface / Fixed |
| Finish | : White epoxy polyester powder coating |

### Light Source


| | |
|---|---|
| Light Source | : LUMILED |
| LED Lumens | : 4800 lm |
| CRI (Ra) | : >80 |
| LED Colour Temperature | : 3000K / 4000K / 6500K |

### Driver

| | |
|---|---|
| Power Supply | : Integral |
| Input Voltage | : 230-240Vac |
| Frequency | : 50-60Hz |
| Power Factor | : >0.90 |
| THD | : <10% |
| Surge Protection | : 2.5KV |
| Efficiency | : >85% |


### Optical Performance

| | |
|---|---|
| Colour Temperature | : 3000K / 4000K / 6500K |
| Luminous flux | : 3763 / 3756 / 3577 lm |
| Optical Beam Angle | : 120° (Fixed) |




IP40

### Light Distribution




**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**