K-LITE

Seagull Mega





AMBATTUR, CHENNAI

Technical Specifications

General

ID	: 24158
System Wattage	: 200W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Suitable for Ø76mm OD Pipe
Finish	: Powder Coated Traffic Grey / Black

Light Source


Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: >70
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >88%


Optical Performance

Optical Distribution	: Type III

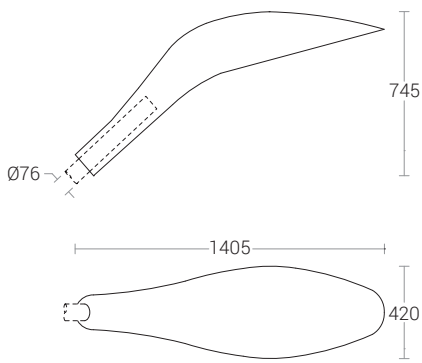

IP65 IK09

Photometric Data



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**