
K-LITE

Nebula Nano



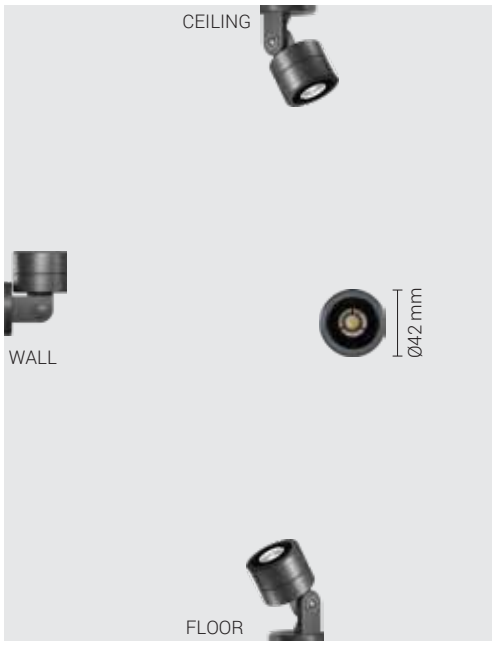

Technical Specifications

General

ID	: 24275
System Wattage	: 3W / 5W
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Die-cast Aluminium Bracket
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver

Power Supply	: Non Integral


Optical Performance

Optical Beam Angle	: 12° / 24° / 40°



IP66 IK07

Cone Diagram



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**