K-LITE

Dixon Pro





Technical Specifications

General

ID	: 24527
System Wattage	: 40W LED
Driver Integral	: Constant Current
Operating Voltage	: 110-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium & Extruded Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for Ø88.9mm OD Pole
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: CITIZEN COB
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

Optical Performance

Optical Beam Angle	: 25°

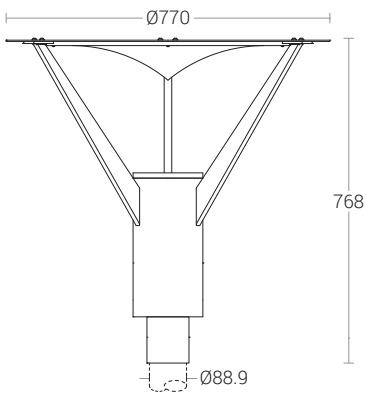

IP65

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**