
K-LiTE

Honeydrop



OPEN SOURCE

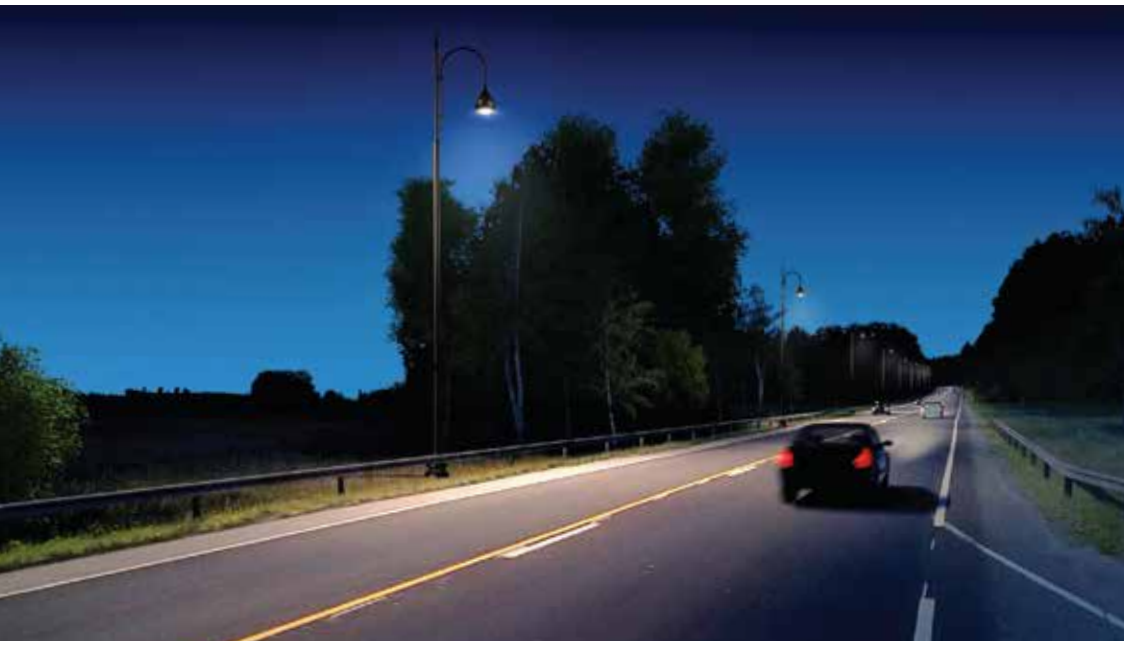

Technical Specifications

General

ID	: 24941 / 24622
System Wattage	: 150W / 200W
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die cast aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for mounting to internally threaded pipe of designation M30
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%

Optical Performance

Optical Distribution	: Type II / Type III / Type IV



IP65

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**