
K-LITE

Aston 2



OPEN SOURCE

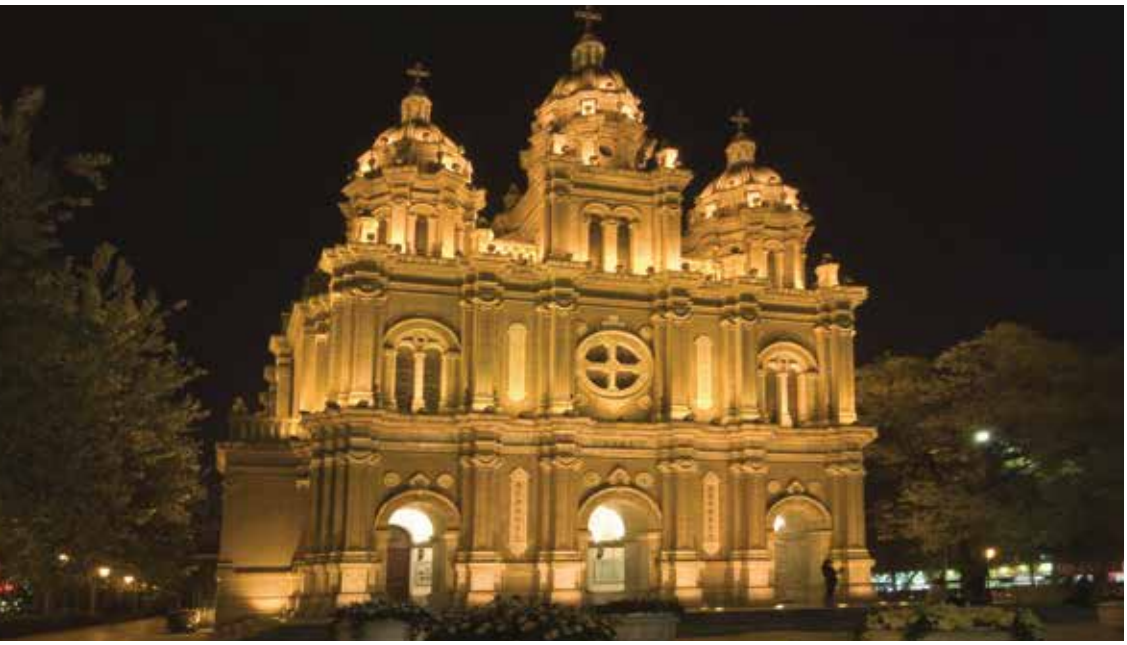

Technical Specifications

General

ID	: 26789
System Wattage	: 2 x 60W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Bracket / Pole - Bracket
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: ≥70
LED Colour Temperature	: 3000K / 4000K / 5700K Amber (25°)

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.98
THD	: <6.5%
Surge Protection	: 4KV
Efficiency	: >90%
Dimmable Option	: Analog / Dali


Optical Performance

Beam Angle	: 12° / 25° / 40° / 60°




IP67 MODULE | IK08

Photometric Data

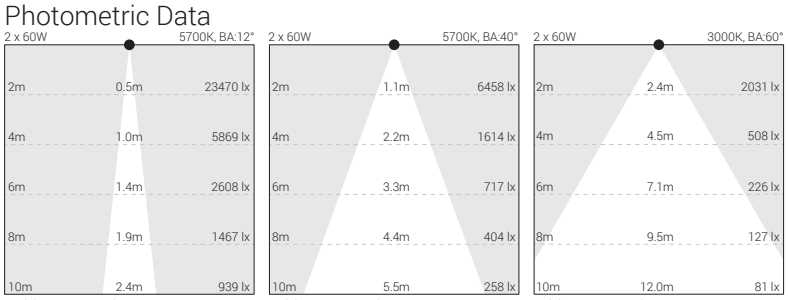

Accessories

Anti Glare Shield



ID : 28298

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at **www.klite.in**