A modern heritage post top luminaire upgraded with high performance light engines. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Designed for highest efficiency in terms of more lumens at reduced wattages.

Product Description

- The luminaire housing made of gravity die cast aluminium top cover, decorative knob & supporting arms.
- · Textured / Translucent acrylic diffuser.
- The lamp compartment encased inside the top portion and the bottom portion attached to a gravity die cast aluminium mounting base.
- · Luminaire integrated with 30W LED.
- · Suitable for mounting on 50mm OD pipe.
- · Cable entries for through-wiring of mains supply cable.
- · Integral constant current power supply
- CRI (Ra): ≥80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide: KL-24509-CCT (Colour Temperature)
- · Available CCT: 2700K, 3000K, 4000K, 5700K









Product Benefits

- · High luminous efficiency at reduced wattage.
- · Elegant, Functionality
- · Environmental Friendly
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Commercial complex, Residential roadways, Walkways, Streetscapes & office complex.

Available Finish

Pure polyester powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey


Diffuser Options





C2 - Translucent Diffuser

C1 - Toyturad Diffusa

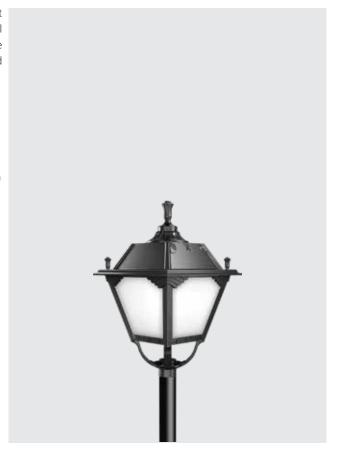





RAMNIWAS BAGH, JAIPUR

Technical Specifications General

ID : 24509 System Wattage : 30W LED Driver Integral : Constant Current Operating Voltage : 100-277Vac Operating Temperature :-15°C~+50°C

Physical

Diffuser

Finish

Body : Die Cast Aluminium top cover

: Translucent / Textured

Acrylic

Mounting : Suitable for Mounting

on Ø50mm OD Pipe : Powder coated

RAL 9004 Black

RAL 9007 Grey aluminium RAL 7016 Anthracite grey

Graphite grey

Light Source

Light Source : LUMILEDS / BRIDGELUX

CŘI (Ra) :≥80

LED Colour Temperature : 2700K / 3000K / 4000K

5700K

Driver

Power Supply : Integral Input Voltage : 230-240Vac Frequency : 50-60Hz Power Factor :>0.95 THD :<10% Surge Protection : 4KV :>85% Efficiency

Optical Performance

Light Distribution : Symmetrical











A modern heritage post top luminaire upgraded with high performance light engines. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Designed for highest efficiency in terms of more lumens at reduced wattages. Product offered in asymmetrical light distribution.

Product Description

- The luminaire housing made of gravity die cast aluminium top cover, decorative knob & supporting arms.
- The lamp compartment encased inside the top portion and the bottom portion attached to a gravity die cast aluminium mounting base.
- · Luminaire integrated with 50W LED.
- · Suitable for mounting on 50mm OD pipe.
- · Cable entries for through-wiring of mains supply cable.
- · Integral constant current power supply
- CRI (Ra): ≥70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide: KL-24515-CCT (Colour Temperature)
- Available CCT: 2700K, 3000K, 4000K, 5700K



Product Benefits

- · High luminous efficiency at reduced wattage.
- · Elegant, Functionality
- · Environmental Friendly
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Commercial complex, Residential roadways, Walkways, Streetscapes & office complex.

Available Finish

Pure polyester powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey







MAA SAMALESWARI TEMPLE, ODISHA

Technical Specifications General

ID : 24515 System Wattage : 50W LED Driver Integral : Constant Current Operating Voltage : 100-277Vac Operating Temperature :-15°C~+50°C

Physical

Body : Die Cast Aluminium top cover

Diffuser : Polycarbonate Optical

Lens

: Suitable for Mounting Mounting on Ø50mm OD Pipe

: Powder coated

RAL 9004 Black

RAL 9007 Grey aluminium RAL 7016 Anthracite grey

Graphite grey

Light Source

Light Source : LUMILEDS / OSRAM

CŘI (Ra) :≥70

LED Colour Temperature : 2700K / 3000K / 4000K

5700K

Driver

Power Supply : Integral Input Voltage : 230-240Vac Frequency : 50-60Hz Power Factor :>0.95 :<10% Surge Protection : 6KV Efficiency :>88%

Optical Performance

Beam Angle : Type III -□325 -050



Finish









A modern heritage post top luminaire. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation.

Product Description

- The luminaire housing made of gravity die cast aluminium top cover, decorative knob & supporting arms.
- · Textured / Translucent acrylic diffuser.
- The lamp compartment encased inside the top portion and the bottom portion attached to a gravity die cast aluminium mounting base.
- · Suitable for mounting on 50mm OD pipe.
- Cable entries for through-wiring of mains supply cable
- Prewired with E27 holder and Suitable for operation on 240V, 50Hz single phase ac supply.



Product Benefits

- Elegant, Robust design
- · Moisture proof, insect free.
- The diffuser contributes to the creation of ambiance and to visual comfort by reducing glare.
- · Low maintenance cost.

Area of Application

Illuminating parks, Gardens, commercial complex, Pathways in residential buildings, office complex & Entrances.

Available Finish

Pure polyester powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Diffuser Options






C2 - Translucent Diffuser

C1 - Textured Diffuse





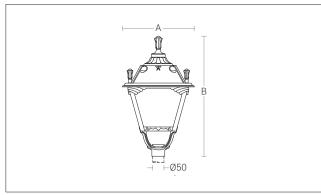

ID	Wattage	А	В
24635 C1/C2	E27	□325	545

A modern heritage post top luminaire upgraded with high performance light engines. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Designed for highest efficiency in terms of more lumens at reduced wattages. Product offered in symmetrical light distribution.

Product Description

- The luminaire housing made of gravity die cast aluminium top cover, decorative knob & supporting arms.
- · Textured / Translucent acrylic diffuser.
- The lamp compartment encased inside the top portion and the bottom portion attached to a gravity die cast aluminium mounting base.
- · Luminaire integrated with 50W LED.
- · Suitable for mounting on 50mm OD pipe.
- · Cable entries for through-wiring of mains supply cable.
- · Integral constant current power supply
- CRI (Ra): ≥70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide: KL-24636-CCT (Colour Temperature)
- Available CCT: 2700K, 3000K, 4000K, 5700K











Product Benefits

- · High luminous efficiency at reduced wattage.
- · Elegant, Functionality
- · Environmental Friendly
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Commercial complex, Residential roadways, Walkways, Streetscapes & office complex.

Available Finish

Pure polyester powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Diffuser Options





C2 - Translucent Niffuser

C1 - Textured Diffuse







CITY PARK, JAIPUR

Technical Specifications General

ID : 24636 System Wattage : 50W LED Driver Integral : Constant Current Operating Voltage : 100-277Vac Operating Temperature :-15°C~+50°C

Physical

Body : Die Cast Aluminium top cover Diffuser : Textured / Translucent

Acrylic Mounting : Suitable for Mounting

on Ø50mm OD Pipe Finish : Powder coated RAL 9004 Black

RAL 9007 Grey aluminium Beam Angle RAL 7016 Anthracite grey

Graphite grey

Light Source

Light Source : LUMILEDS / OSRAM CŘI (Ra) :≥70 LED Colour Temperature : 2700K / 3000K / 4000K

5700K

Driver

Power Supply : Integral Input Voltage : 230-240Vac Frequency : 50-60Hz Power Factor :>0.95 THD :<10% Surge Protection :6KV Efficiency :>88%

Optical Performance

:60°













