



# Stencil

A decorative light column designed to provide soft, uniform light. An elegant and efficient column with translucent diffuser enclosure to prevent glare and provide a unique, comfortable light choice. A sleek minimalist shape provides distinctive lighting effects by night and decorative urban effect during the day.

## Technical Specifications

- The luminaire totally weather proof with housing made of rectangular tube, integrated with supporting arms and MS pipe and non corrosive SS fasteners.
- Non yellowing UV stabilized translucent acrylic diffuser for glare free, uniform light distribution.
- GI mounting plate with an anchorage unit made out of hot dip galvanised steel for extra guarantee against corrosion.
- Cable entries for through-wiring of mains supply cable.
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP53
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

## Product Benefits



- Practical . Elegant . Efficient
- Easy to maintain, robust and durable construction.
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

## Area of Application

Suitable for Private & Public areas, Illuminating Driveways, Pathways, Boulevard's, Entrances, Squares & Gardens.

## Available Finish

Pure polyester powder coated Graphite grey / Black.

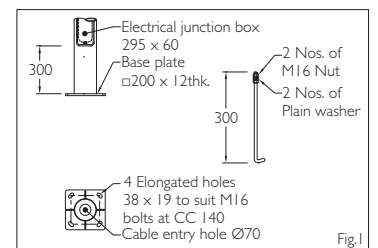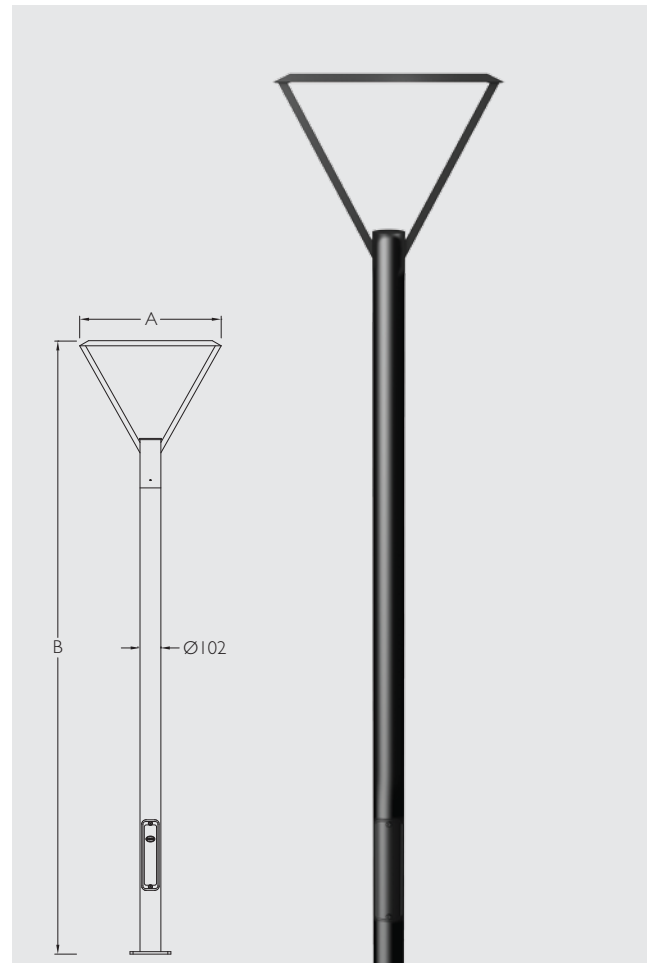

ID	Wattage	A	B	Mounting
4238	40W LED	692	3000	Fig.1

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)



**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.