



Hybrid Bollard - Pyro Top

These environmental friendly sleek energy efficient garden & pathway luminaires, create a pleasant and symmetrical light distribution with a high degree of visual comfort. These luminaires offer shielded glare free illumination of ground surface. Clean Lines and pure form are the underlying elements of this series of bollards.

Technical Specifications

- Luminaire made of extruded aluminium alloy (grade 6063) with die-cast aluminium components and non corrosive SS fasteners.
- For optimum coordination with lighting situation, these luminaires can be supplied in two different mounting heights.
- Reflector system made of spun aluminium.
- Non yellowing UV stabilized polycarbonate translucent diffuser.
- Silicone gasket
- Cast Iron mounting plate with an anchorage unit made out of hot dip galvanised steel for extra guarantee against corrosion. Luminaire can be aligned on the mounting plate around 360°.
- Cable entries for through-wiring of mains supply cable.
- Protection class IP 54
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits


- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.
- Dark sky compliant protects pedestrians from glare by preventing spill light above the horizontal plane.

Area of Application

Suitable for Residential & Public areas for Illuminating Driveways, Pathways, Flowerbeds, Entrances, Squares, Gardens and as well as landscape architecture.

Available Finish

Pure polyester powder coated Graphite grey / Black.

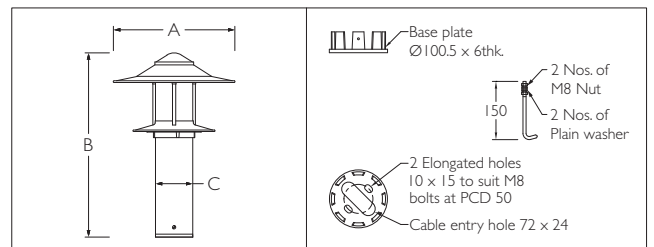

ID	Holder	A	B	C
4831	E27	Ø325	1020	Ø100
4832	E27	Ø325	490	Ø100



For the latest technical information, Installation guidelines and product updates please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.