

Umbrellya



Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Low glare indirect post top luminaire designed for symmetrical light distribution.

Technical Specifications

- Die cast aluminium spigot base integrated with extruded aluminium pipe and a collar.
- Reflector system made of spun aluminium white powder coated with a convergent knob to simulate a lighting source, and supporting brackets.
- The lamp along with control gear is housed inside and covered with a toughened glass diffuser at the top portion of extruded aluminium tube and the bottom portion attached to a mounting base.
- Suitable for mounting on 60mm OD pipe.
- Cable entries for through-wiring of mains supply cable
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP54
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Functionality
- Environmental Friendly
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, commercial complex, Pathways in residential buildings & office complex.

Available Finish

Pure polyester powder coated Black.

Accessory


A separate IP67 rated connector can be supplied for a secure connection to the network.

Light Distribution


Luminaire photometric data IES files for the light planning program DIALux can be downloaded in IES-format on the K-LITE web page www.klite.in

Installation Recommendation

For latest technical information, Installation guidelines and product updates please refer to our website at www.klite.in

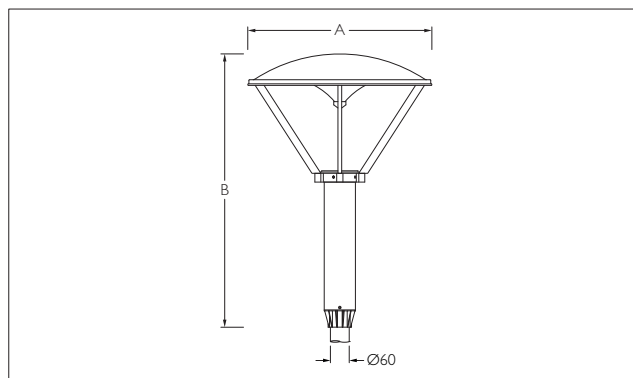

ID	Wattage	A	B
6621	70W MH G12	Ø590	870
5031	20W LED	Ø590	870

 Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.