

Cubus - Cutoff Bollard



These environmental friendly energy efficient garden luminaires accentuate the garden architecture creating a pleasant and symmetrical light distribution. Bollard luminaires contribute to safety by illuminating pathways and other open spaces.

Technical Specifications

- Luminaire made of extruded aluminium alloy (grade 6063) with non corrosive SS fasteners.
- For optimum coordination with lighting situation, these luminaires can be supplied in three different mounting heights.
- Reflector system made of spun aluminium.
- Non yellowing UV stabilized acrylic translucent diffuser.
- MS mounting plate with an anchorage unit made out of hot dip galvanised steel for extra guarantee against corrosion.
- Cable entries for through-wiring of main supply cable.
- Safety class II
- Protection class IP 54
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- Elegant, Robust design.
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.

Area of Application


Suitable for Residential & Public areas for Illuminating Driveways, Pathways, Flowerbeds, Entrances, Squares, Gardens and as well as landscape architecture.

Available Finish

Pure polyester powder coated Graphite grey / Black.



DECORATIVE BOLLARDS

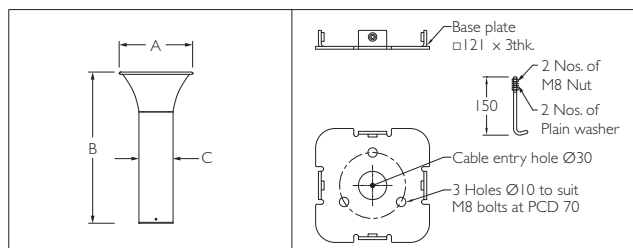

| ID | Holder | A | B | C |
|------|--------|------|------|-------|
| 7014 | E27 | Ø258 | 1000 | □ 120 |
| 7015 | E27 | Ø258 | 525 | □ 120 |
| 7016 | E27 | Ø258 | 325 | □ 120 |

Max. Wattage : 11W LED / 20W CFLE



For the latest technical information, Installation guidelines and product updates please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.