



## Sudo / Sudo Mini - Open Frame

Sudo represents a perfect combination of sleek aesthetic fixture designed for optimum illumination performance. The luminaires have high quality LED source with low energy consumption and long service life. Designed for low mounting heights for illumination where guidance and security lighting is required.

The small scale of these luminaires makes them especially suitable for installation in step risers for both interior and exterior applications.

### Technical Specifications

- Luminaire made of pressure die cast aluminium alloy with non corrosive SS fasteners.
- Non yellowing UV stabilized translucent acrylic diffuser.
- Silicon gasket.
- Industrial plastic Installation housing for preparing the recess opening in the wall / stairs.
- Cable entries for through-wiring of mains supply cable.
- Integral power supply.
- Earth connection.
- Safety class I.
- Protection class IP65.
- CE - Conformity mark.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-2754-CCT ( Colour Temperature ).
- Available CCT WW : Warm White (2700K), CW : Cool White (5700K), NW : Neutral White (4000K).

### Product Benefits

- High luminous efficiency at reduced wattage.
- A sleek and minimalist shape provides distinctive lighting effects for walkway architecture.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application

Staircase, Patios, Pathways, Passages, Porches, Entrance & Exits for both Interiors & Exteriors applications.

### Available Finish

Pure polyester powder coated Graphite grey.




The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)




**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.



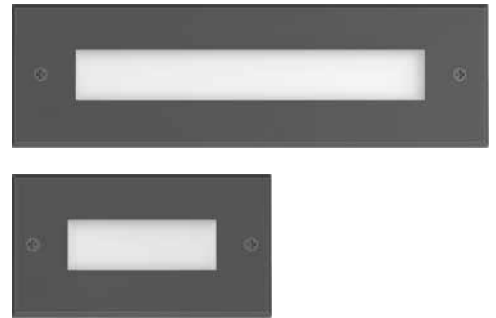

Sudo Mini / Sudo - Open Frame

ID	Wattage	A	B	C	Cutout(mm)
2754	3W LED	130	76	90	126 x 71 x 83
2745	6W LED	130	76	90	126 x 71 x 83
2753	6W LED	255	76	90	242 x 71 x 83
2741	12W LED	255	76	90	242 x 71 x 83

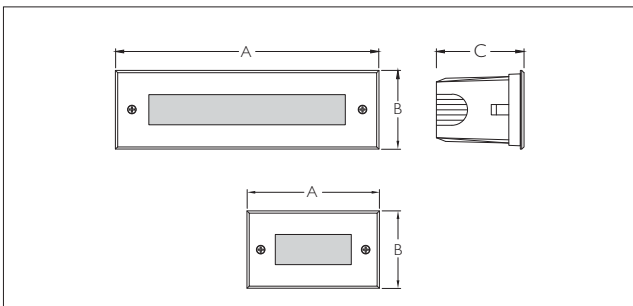

Photometric

