



## Diva Ultra Slim Down Lighters

"Diva" recess mounted range of LED ultra slim ceiling lights are a perfect fit for varied lighting applications. The die cast aluminium housing is ideal for better thermal management. High lumen output, Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions.

### Technical Specifications

- Luminaire made of die-cast aluminium for better thermal management.
- High efficiency diffuser for glare free, uniform light distribution.
- High lumen output, Integrated with SMT 2835 LEDs.
- High PF constant current LED driver with surge and thermal protection.
- Ideal for super low depth space constraint false ceiling.
- Cable entries for through-wiring of mains supply cable.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-7671-CCT ( Colour Temperature )
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K), NW : Neutral White (4000K).

### Product Benefits


- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Very low mounting depth.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.
- Diffuser upto 85% transmission level for better efficiency and higher lumens output.

### Area of Application

Lobbies & Foyers, Retail Sector, Corporate Office, Airports & Hospitals, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers, Interior Traffic areas.

### Available Finish

White epoxy polyester powder coating.

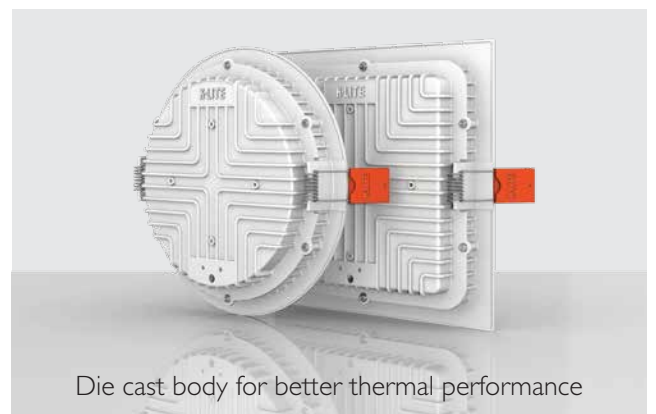

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)




**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.




Diva Round

ID	Wattage	Cutout(mm)
7671	6W LED	Ø107
7665	10W LED	Ø107

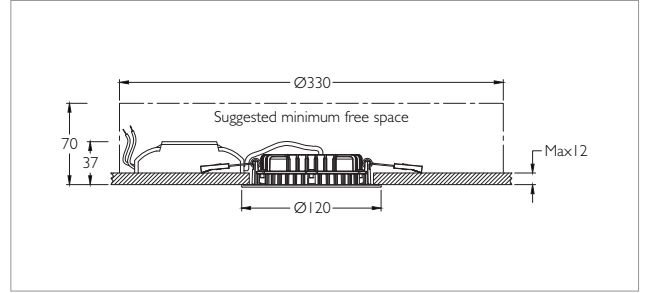


Diva Round

ID	Wattage	Cutout(mm)
7666	18W LED	Ø157

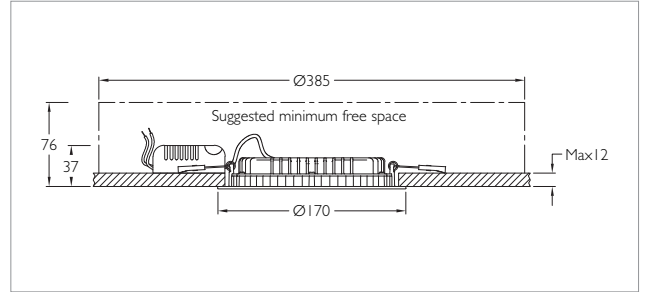


Diva Round

ID	Wattage	Cutout(mm)
7667	26W LED	Ø206

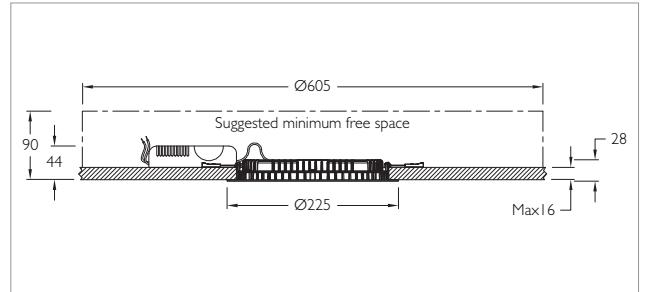


Diva Square

ID	Wattage	Cutout(mm)
7672	6W LED	□107
7668	10W LED	□107

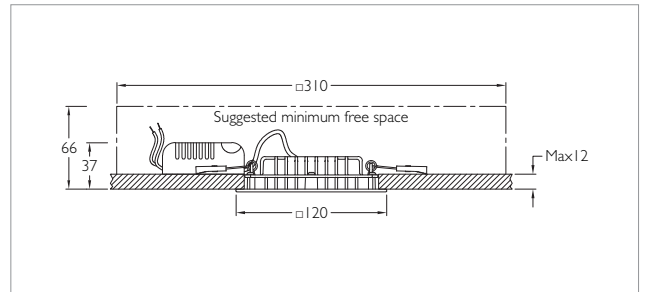

Diva Square

ID	Wattage	Cutout(mm)
7669	18W LED	□157

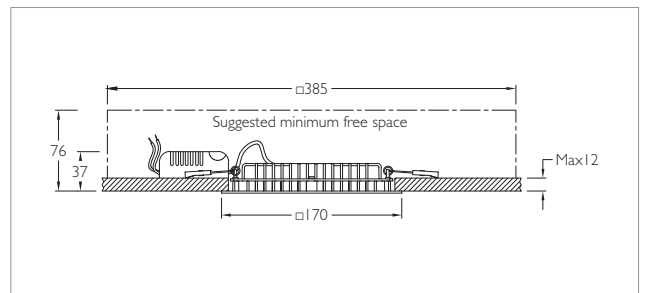

Diva Square

ID	Wattage	Cutout(mm)
7670	26W LED	□206

