

Gemma Round



"Gemma" recess mounted range of LED ceiling lights are a perfect fit for varied lighting applications. The die cast aluminium housing is ideal for better thermal management. High lumen output / Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions.

Technical Specifications

- Luminaire made of die-cast aluminium for better thermal management.
- Pressure die-cast aluminium inner adjustable ring with reflector for uniform light distribution.
- High PF constant current LED driver with surge and thermal protection.
- Cable entries for through-wiring of mains supply cable
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-7656-CCT (Colour Temperature)
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K), NW : Neutral White (4000K).

Product Benefits





- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Replacement of existing CFL downlights with even better performance.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

Area of Application

Lobbies & Foyers, Retail Sector, Corridors, Corporate, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers.

Available Finish

White epoxy polyester powder coating.

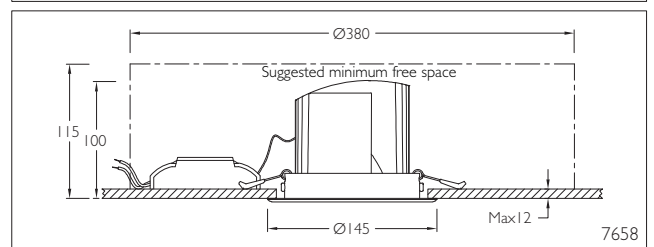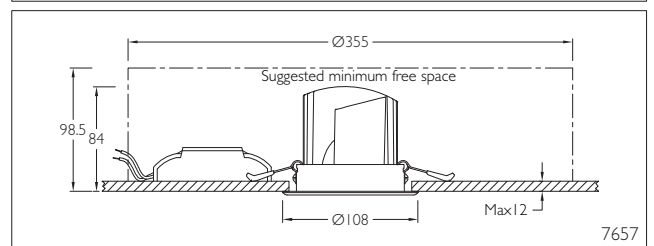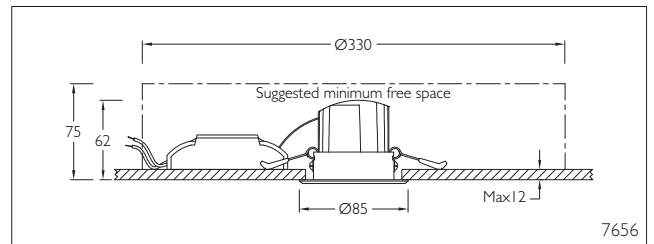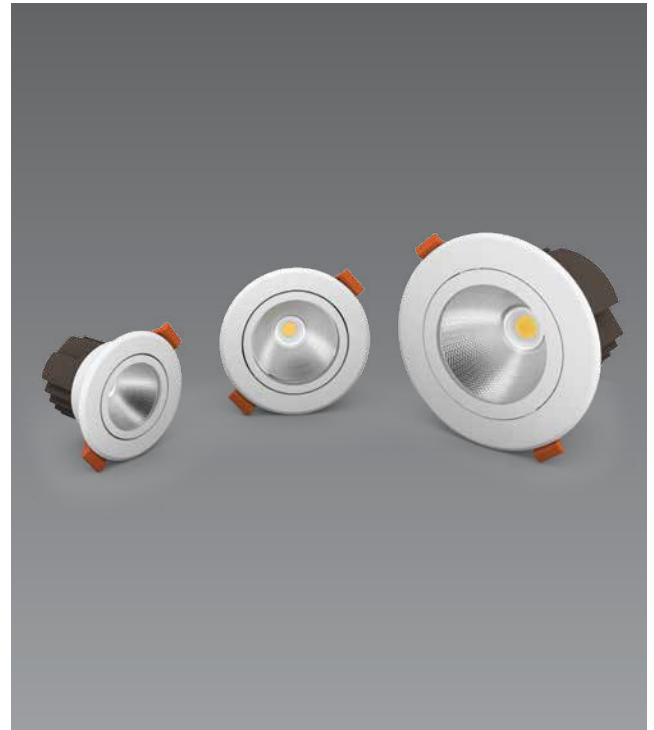

ID	Wattage	Beam Angle	Cutout(mm)
7656	10W LED	24°	Ø75
7657	15W LED	24°	Ø98
7658	25W LED	24°	Ø130

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.