

Diva 7



"Diva 7" recess mounted range of LED ultra slim ceiling lights are ideal for LG7 compliance lighting applications. The die cast aluminium housing for better thermal management. High lumen output, Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions. The diffuser is designed to comply with LG7 lighting requirement.

Technical Specifications

- Luminaire made of die-cast aluminium for better thermal management.
- The specially designed LG7 diffuser is a unique combination of high light transmission through optimized diffuser technologies.
- High lumen output, Integrated with SMT 2835 LEDs.
- High PF constant current LED driver with surge and thermal protection.
- Ideal for super low depth space constraint false ceiling.
- Cable entries for through-wiring of mains supply cable
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-7246-CCT (Colour Temperature)
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K), NW : Neutral White (4000K).

Product Benefits


- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Very low mounting depth.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications
- Diffuser upto 85% transmission level for better efficiency and higher lumens output.

Area of Application

Lobbies & Foyers, Retail Sector, Corporate Office, Airports & Hospitals, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers, Interior Traffic areas.

Available Finish

White epoxy polyester powder coating.

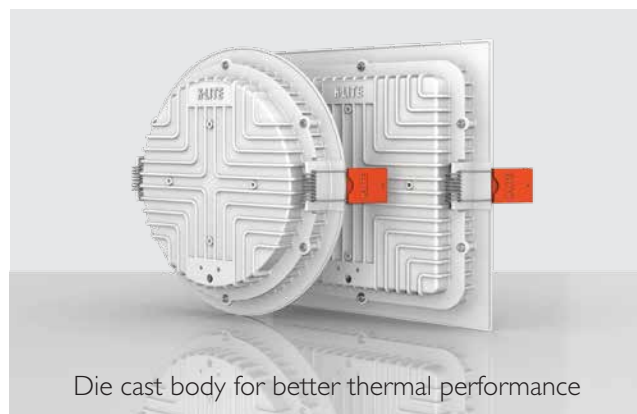

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in




Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.




Divia 7 Round

ID	Wattage	Cutout(mm)
7246	6W LED	Ø107
7247	10W LED	Ø107

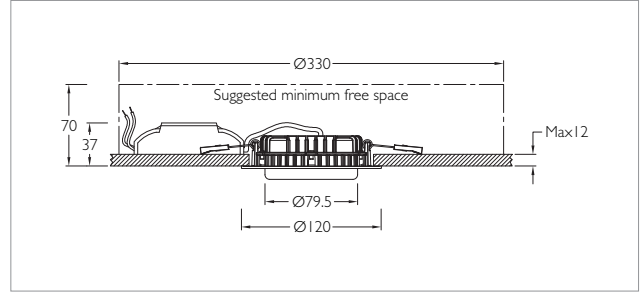


Divia 7 Round

ID	Wattage	Cutout(mm)
7248	18W LED	Ø157

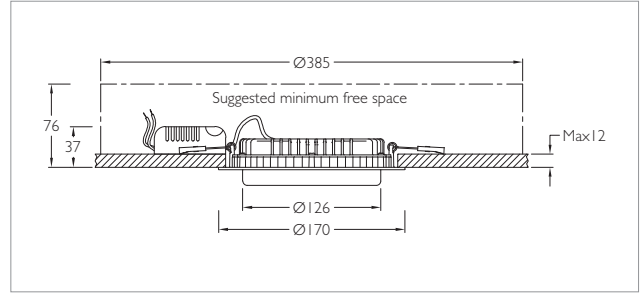


Divia 7 Round

ID	Wattage	Cutout(mm)
7249	26W LED	Ø206

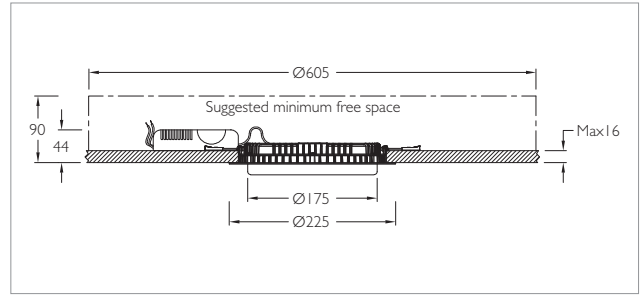


Divia 7 Square

ID	Wattage	Cutout(mm)
7250	6W LED	□107
7251	10W LED	□107

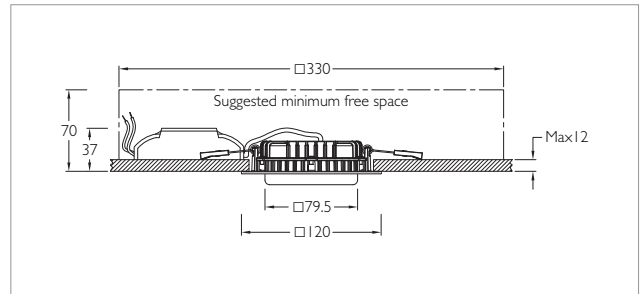

Divia 7 Square

ID	Wattage	Cutout(mm)
7252	18W LED	□157

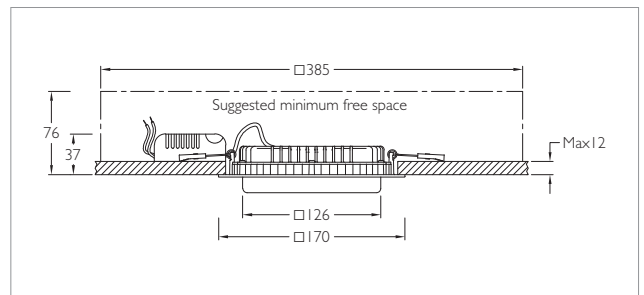

Divia 7 Square

ID	Wattage	Cutout(mm)
7253	26W LED	□206

