

# Wall Dena



"Wall Dena" surface mounted range of LED wall lights are a perfect fit for varied lighting applications. Designed for highest efficiency in terms of more lumens at reduced wattages contributing to a Greener World. Aesthetically shaped wall mounted luminaire for updown lighting effects.

## Technical Specifications


- Luminaire made of extruded aluminium with fabricated aluminium frame
- Extruded aluminium housing profile designed to throw upward and downward lighting.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable
- Protection class IP20
- CE - Conformity mark
- Prewired with constant current LED driver and suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3980-CCT ( Colour Temperature )
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K).

## Product Benefits


- Excellent efficiency for high energy savings of up to 80% compared to CFL wall lights.
- Replacement of existing CFL wall lights with even better performance.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

## Area of Application

Lobbies & Foyers, Retail Sector, Residential, Internal passages, Commercial & Business Centers.

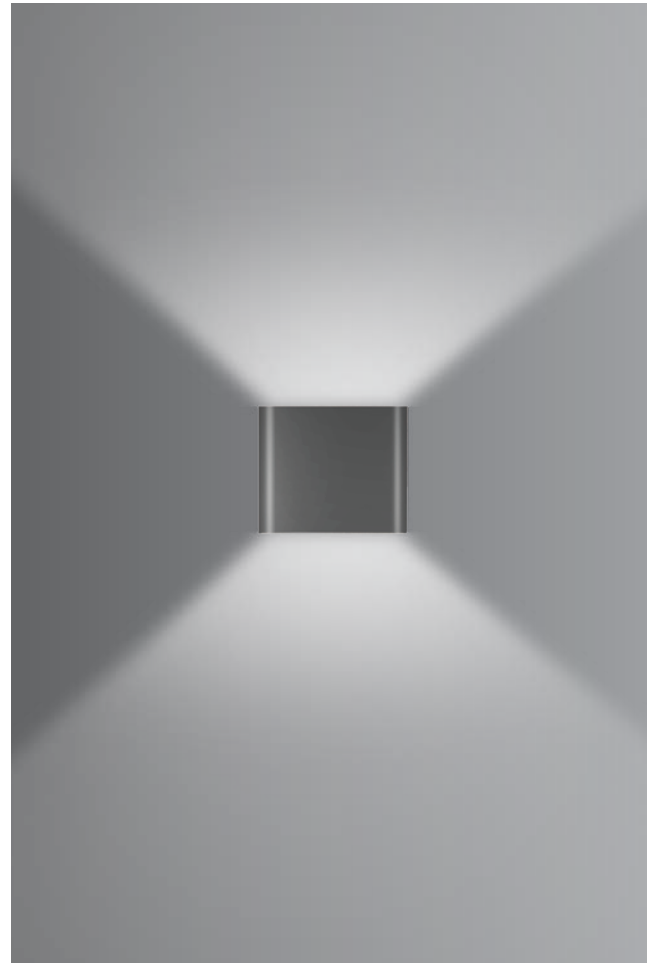

WALL LIGHTS

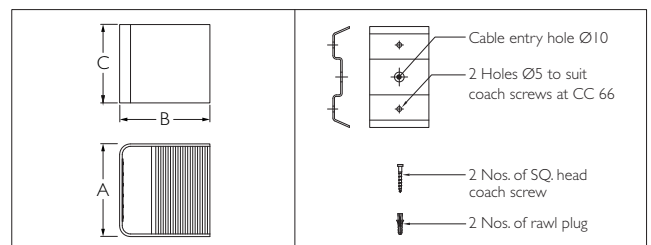

ID	Wattage	A	B	C
3980	6W LED	111	108	94

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)



**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.