

Navira Mini



Navira pathway luminaire, is an innovative design options to provide visual integration with the environment. Designed for high lumen efficiency at reduced wattage creating exceptional visual comfort. Product offered asymmetrical light distribution.

Technical Specifications

- Luminaire body made of die-cast aluminium for better thermal management.
- Fully shielded light source for down lighting effects, integrated with 30W LED.
- Clear polycarbonate optical cover
- Bracket section welded by certified welders using high end MIG welding processes.
- Suitable for mounting on 70 mm Square pipe.
- Cable entries for through-wiring of mains supply cable
- Integral power supply
- Earth connection
- Safety class I
- Protection class : IP68 LED Module
- Prewired with LED driver and suitable for operation on 240V, 50Hz, single phase ac supply.

Product Benefits

- High luminous efficiency at reduced wattage.
- Functionally versatile, strong and stable with sound engineering.
- Corrosion resistant and Maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application


Commercial complex, Pathways in residential buildings & office complex, Illuminating parks.

Available Finish

Bracket coated with epoxy zinc phosphate primer and finished using environmentally stable polyurethane based paint (Standard colour : Black).



PATHWAY LUMINAIRES

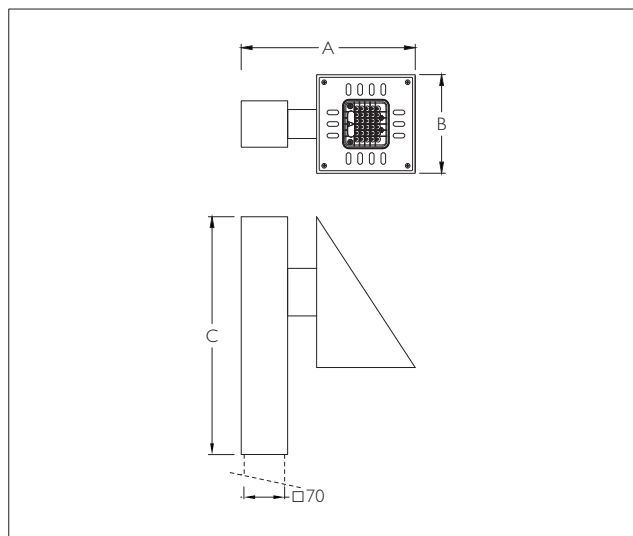

ID	Wattage	A	B	C
4954	30W LED	300	□170	410



Asymmetrical Distribution.

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.