

Ray Ultra



Innovative Design options to provide Visual integration with the environment. High Brightness, LED Light source do not pose any environment risks. Designed for highest efficiency in terms of more lumens at reduced wattages contributing to a Greener World. Long life span with very low maintenance.

Technical Specifications


- Aluminium alloy body and top cover; featuring high strength and anti corrosion.
- LED modules are fixed to frame.
- Top cover retained by screw for easy maintenance.
- Clear polycarbonate optical cover.
- Suitable for lateral (side entry) mounting on 60mm dia pipe.
- 10KV Surge Protection.
- Cable entries for through-wiring of mains supply cable
- Integral power supply
- Earth connection
- Safety class I
- Double-coupling IP68 protection for module, highest waterproof level.
- CE - Conformity mark
- Prewired with LED driver and suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- High luminous efficiency at reduced wattage.
- Modular pluggable technology, easy-tool onsite maintenance.
- Functionally versatile, strong and stable with sound engineering.
- Corrosion resistant and Maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application


Street Lighting, Park Lighting, Expressways, Highways, Courtyards.

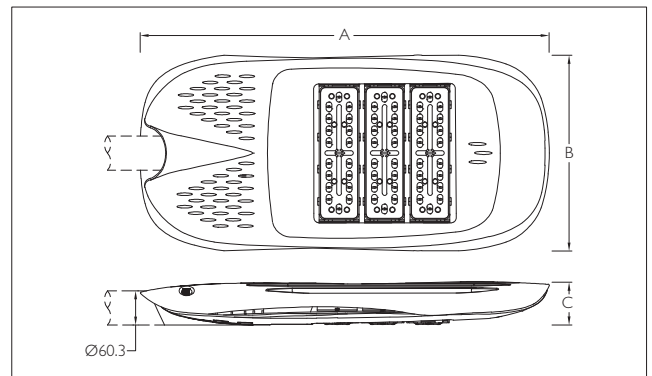

ID	Wattage	A	B	C
4175	1 x 60W LED	800	345	75
4163	2 x 60W LED	800	345	75
4164	3 x 60W LED	800	345	75
4174	4 x 60W LED	800	345	75



Photometric Data

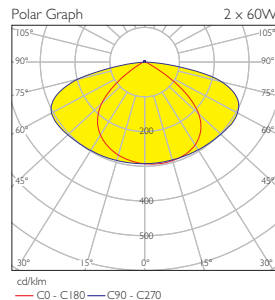

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.