


In-Ground Luminaires



The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.

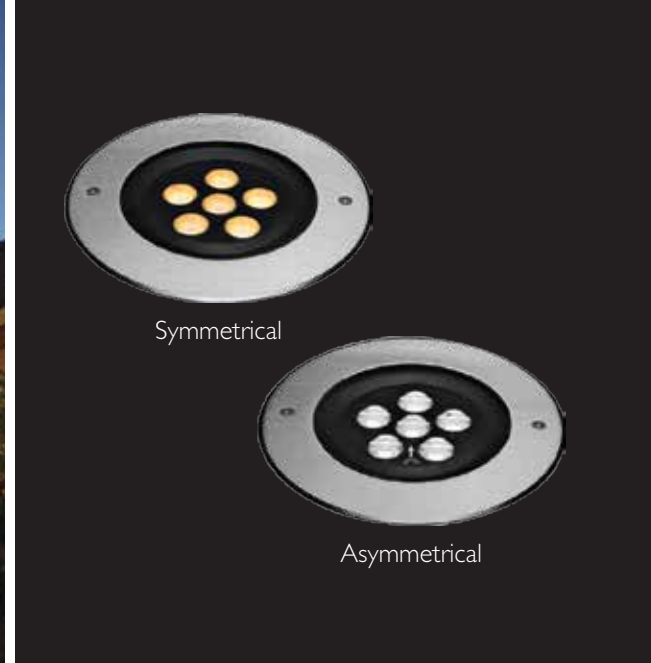

Technical Specifications


- Luminaire made up of die-casting grey powder coated aluminium, corrosion resistance with low copper content.
- Hard chromeplated stainless steel 316 grade front ring.
- Silicone seal gasket.
- Stainless steel screws.
- Step tempered glass of 8mm thickness with static load resistance of 3489 kgs.
- Optical lens efficiency $\geq 85\%$
- Luminaire hard wired with $3 \times 1.0\text{mm}^2$ cable of 0.5mts length.
- Supplied with mounting sleeve for preparing recessed opening in ground.
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP67
- Mechanical resistance IK09
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- High luminous efficiency at reduced wattage.
- A sleek and minimalist shape provides distinctive lighting effects.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Walk ways, Facades, Landscapes, Architectural elements.

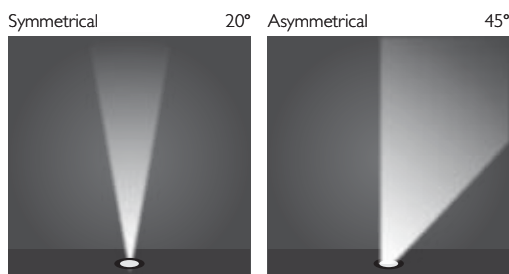

ID	Wattage	Distribution	Colour Temperature	Beam Angle
4089	6 x 3W	Symmetrical	WW / CW	20°
4090	6 x 3W	Asymmetrical	WW / CW	45° / 35°

Photometric Data

