

In-Ground Luminaires



The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.



Technical Specifications


- Luminaire made up of die-casting dark grey powder coated aluminium, corrosion resistance with low copper content.
- Hard chromeplated stainless steel 316 grade front ring.
- Silicone seal gasket.
- Stainless steel screws.
- Step tempered glass of 7mm thickness with static load resistance of 1704 kgs.
- Optical lens efficiency $\geq 85\%$
- Luminaire hard wired with $3 \times 1.0\text{mm}^2$ cable of 0.5mts length.
- Supplied with mounting sleeve for preparing recessed opening in ground.
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP67
- Mechanical resistance IK08
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- High luminous efficiency at reduced wattage.
- A sleek and minimalist shape provides distinctive lighting effects.
- Sustainable LED technology offers durability and optimal light output with low power consumption.



Area of Application

Walk ways, Facades, Landscapes, Architectural elements.

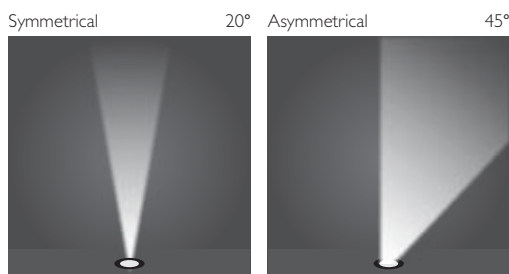

ID	Wattage	Distribution	Colour Temperature	Beam Angle
4092	3W	Symmetrical	WW / CW	20°
4093	3W	Asymmetrical	WW / CW	45° / 35°


Photometric Data

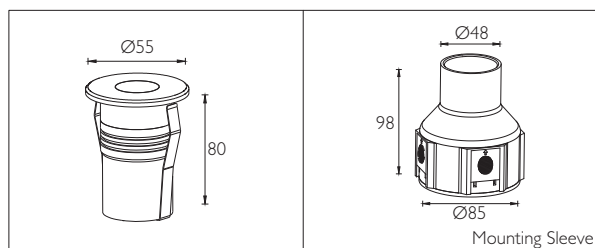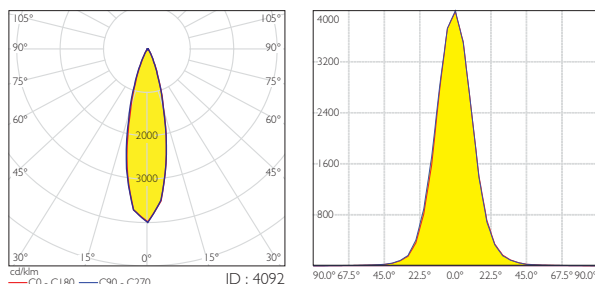




In-Ground - One Way

ID	Wattage	Colour Temperature
4133	3W	WW / CW



Photometric Data

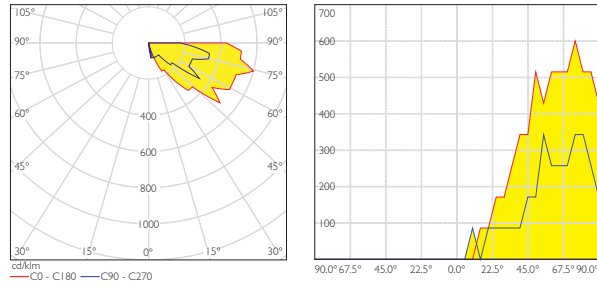


In-Ground - Two Way

ID	Wattage	Colour Temperature
4134	3W	WW / CW



Photometric Data

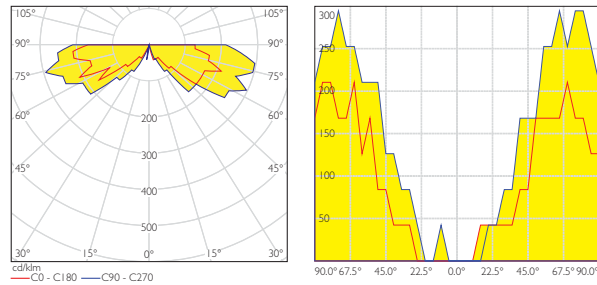

In-Ground - Four Way

ID	Wattage	Colour Temperature
4135	3W	WW / CW



Photometric Data

