


# In-Ground Luminaires



## Feature

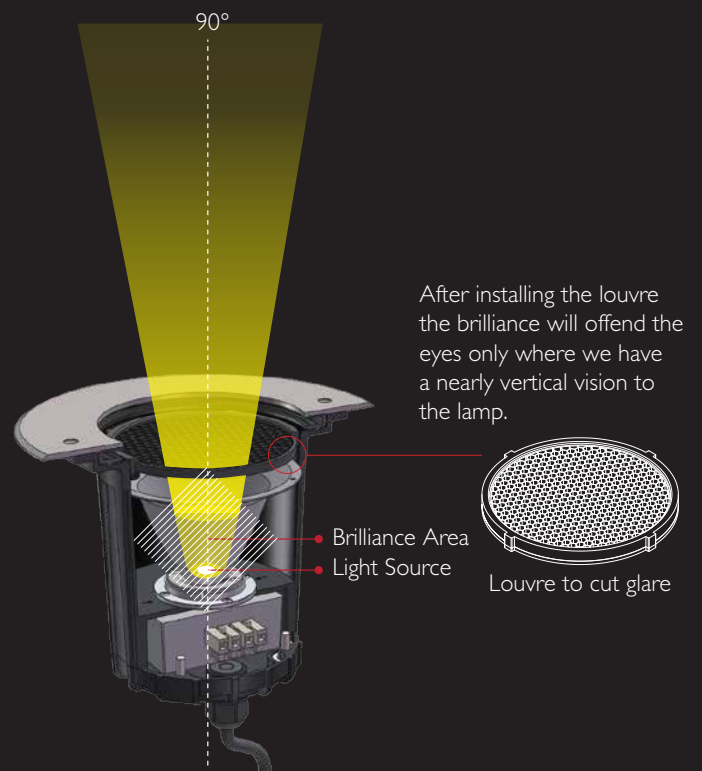

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)



**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.



## Technical Specifications

- Luminaire made up of die-casting grey powder coated aluminium, corrosion resistance with low copper content.
- Hard chromeplated stainless steel 316 grade front ring.
- Molding shaped seal gasket.
- Step tempered glass of 8mm thickness with static load resistance of 2526 kgs.
- IP68 PG-9 cable gland
- Optical reflector efficiency  $\geq 90\%$
- Luminaire hard wired with  $3 \times 1.0\text{mm}^2$  cable of 0.5mts length.
- Supplied with mounting sleeve for preparing recessed opening in ground.
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP67
- Mechanical resistance IK09
- $\text{CE}$  - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.


## Product Benefits

- High luminous efficiency at reduced wattage.
- A sleek and minimalist shape provides distinctive lighting effects.
- Sustainable LED technology offers durability and optimal light output with low power consumption.


## Area of Application

Walk ways, Facades, Landscapes, Architectural elements.

## Optional Louver

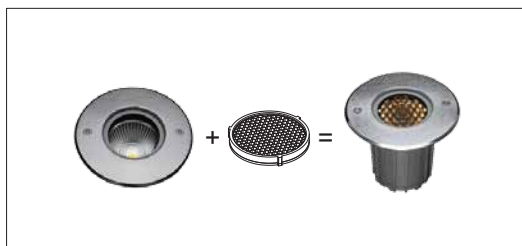

## Louver effect



ID	Wattage	Distribution	Colour Temperature	Beam Angle
4091	8.5W	Symmetrical	WW / CW	20°

## Photometric Data

