

Bumblebee



High efficiency LED flood light luminaires designed to provide directional wall throw. The product design and construction of the luminaires are characterized by high luminous efficiency, an extremely long service life and uniform illuminance.

Technical Specifications

- Housing made up of die-casting aluminium.
- Clear polycarbonate diffuser
- Heat dissipation by special heat-sink design
- High lumen output, Integrated with SMD 2835 LEDs.
- Mounting bracket with tilting feature to facilitate proper aiming of the luminaire at desired angle.
- Cable entries for through-wiring of mains supply cable.
- Available in 120° beam angle
- Integral power supply options
- Earth connection
- Safety class I
- Protection class IP65
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-7071-CCT (Colour Temperature)
- Available CCT WW : Warm White (2800-3100K), CW : Cool White (6000-6800K), NW : Neutral White (3800-4300K).

Product Benefits

- High luminous efficiency at reduced wattage.
- Versatile use, Simple installation.
- Compact size, Optimum performance
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Building Facade, Signage, Building mounted focal points, Flag Lighting, Bridges, Roadway Interchanges, Ideal for parking lots.

Available Finish

Pure polyester powder coated Graphite grey and yellow.



FLOOD LIGHTS

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.




Various Applications



Bumblebee

ID	Wattage	A	B	C
7071	30W LED	143	62	202
7072	50W LED	193	62	202

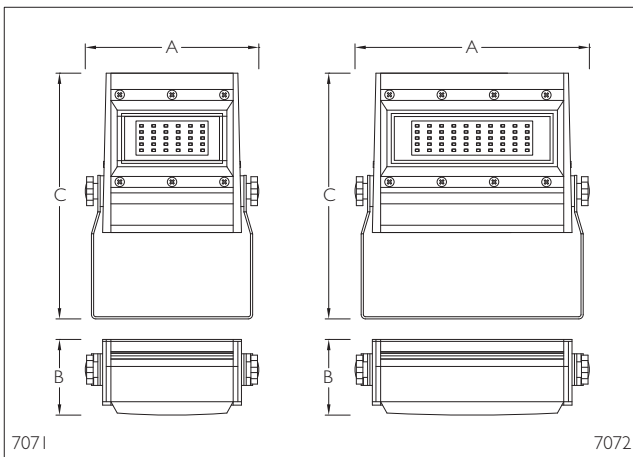

Benefits

- Luminous flux 2850 & 4750 lm
- High lumen output, Integrated with SMD 2835 LEDs.
- Sustainable LED Technology
- Easy installation system
- Long service life



Adjustable

