





Architectural Lighting

Technical Specifications


- Luminaire made of die-cast aluminium for better thermal management.
- High efficiency diffuser for glare free, uniform light distribution.
- High PF constant current LED driver with surge and thermal protection.
- Ideal for super low depth space constraint false ceiling.
- Cable entries for through-wiring of mains supply cable (max. 3 x 0.5 Sqmm)
- Optics 12° 34° 48° Beam angle
- Protection class IP 20
-  - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-7440 / 7445 / 7446 / 7447 / 7449 / 7450 / 7451-CCT (Colour Temperature)
- Available CCT WW : Warm White (2700K), CW : Cool White (6000K), NW : Neutral White (4000K).
- Powered By 

Product Benefits


- Innovation, Visual comfort
- Linear shape
- Compact dimensions
- Minimalist design
- Anti-glare
- Quick & simple installation.
- High performance
- Sustainable LED technology

Area of Application

Shopping malls, Corporate Office, Airports, Stations, Conference Center, Clubs, Villas, Restaurants.


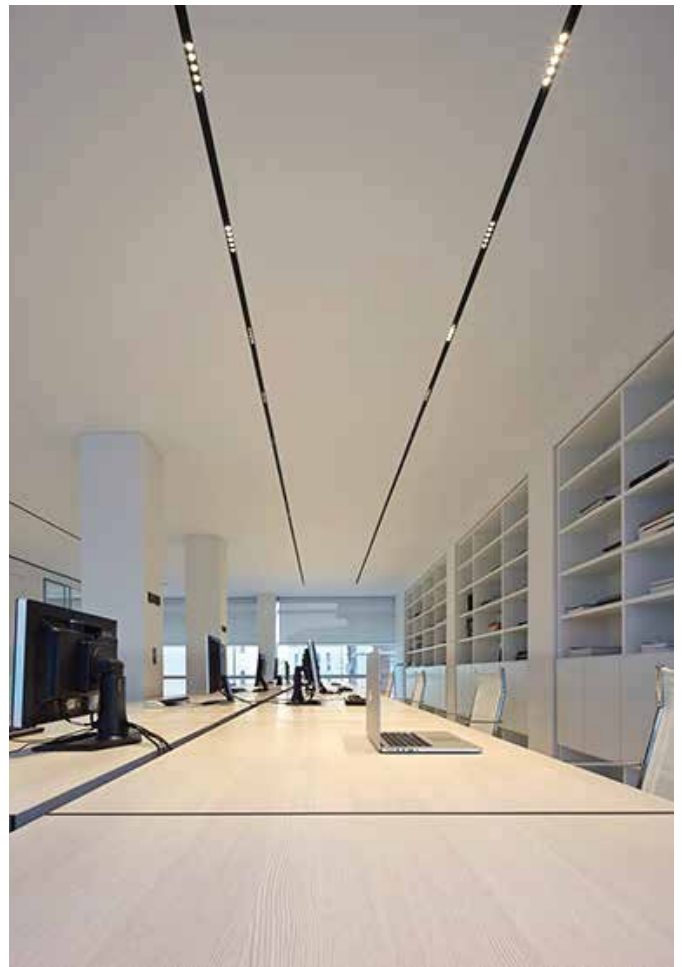


Line 'n' dot

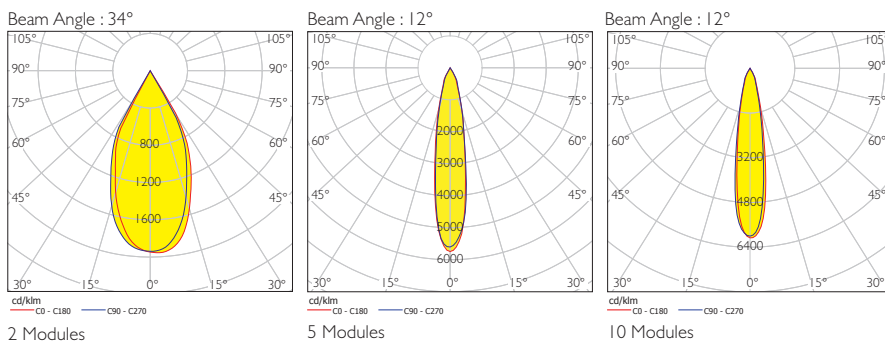



Line 'n' Dot Down Lighters

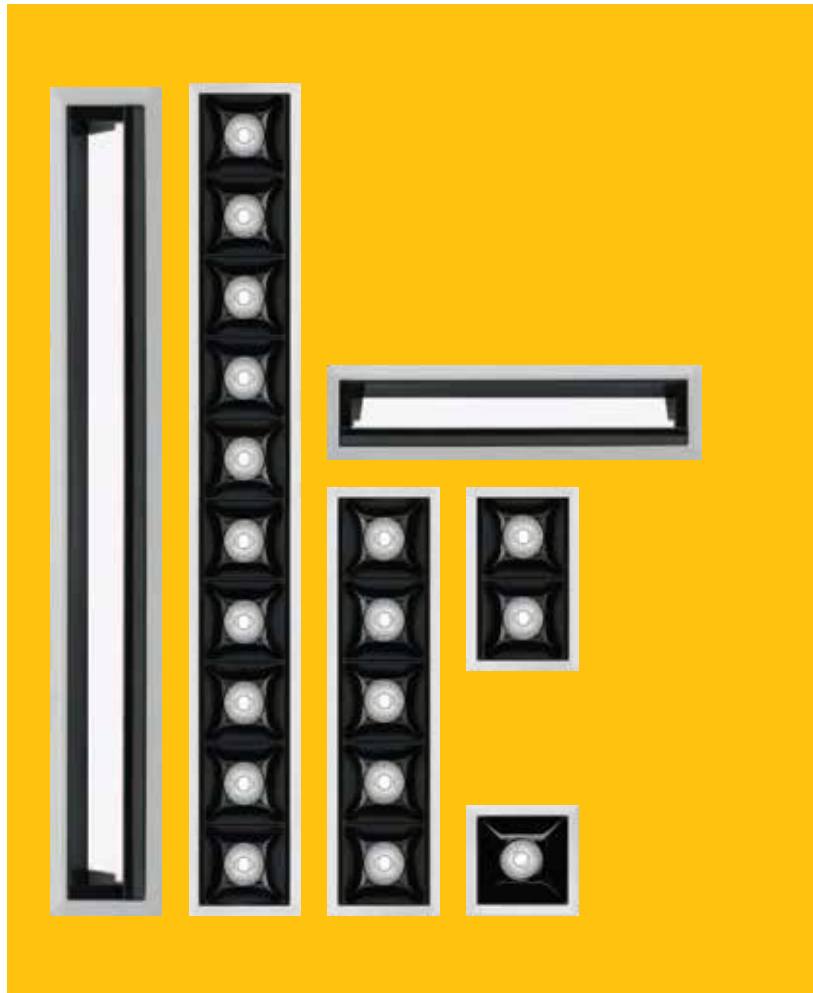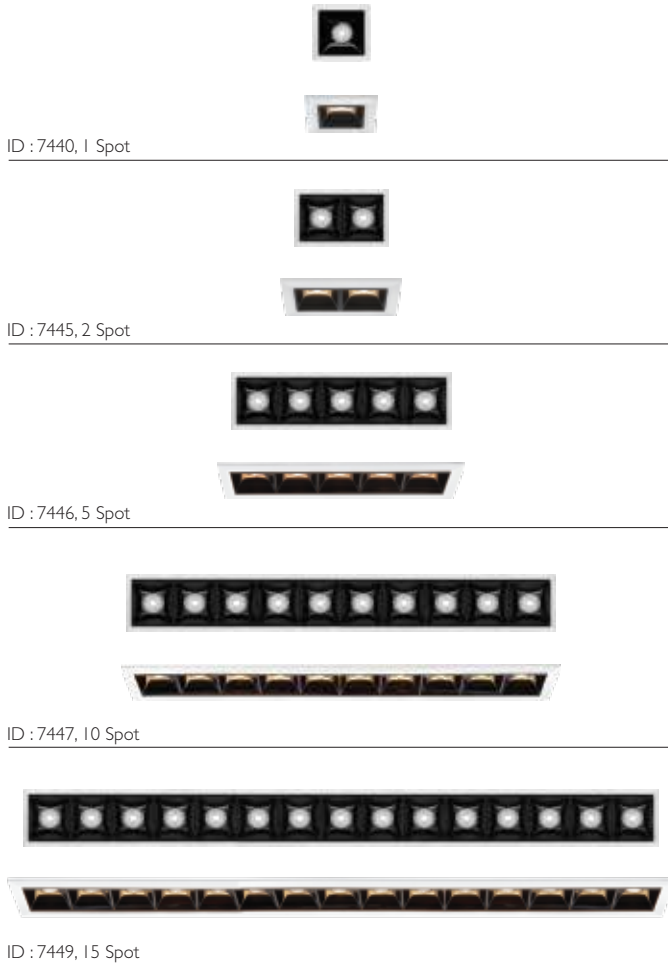

Specifications

ID		Wattage / Lumens	Optic	C.O.D	Dimension (mm)
7440		2W 187 lm	 12° 34°	38 x 38	44.5 x 44.5 x 47
7445		4W 375 lm	 12° 34°	65 x 38	73 x 44.5 x 47
7446		10W 910 lm	 12° 34° 48°	138 x 35	148 x 44.5 x 56.5
7447		20W 1845 lm	 12° 34° 48°	271 x 35	281 x 44.5 x 56.5
7449		30W 2750 lm	 12° 34° 48°	403 x 35	413 x 44.5 x 56.5
7450, Glare cut off 58°	 Wall Washer	10W 910 lm	 12°	137 x 35	148 x 44 x 56.5
7451, Glare cut off 58°		20W 1845 lm	 12°	271 x 35	281 x 44 x 56.5