

Wall Trio



High Brightness, LED light source do not pose any environment risks. Designed for highest efficiency in terms of more lumens at reduced wattages contributing to a Greener World. Aesthetically shaped wall mounted luminaire for up / down and updown lighting effects.

Technical Specifications

- Luminaire made of extruded aluminium triangular tube with die cast aluminium frame
- Toughened clear glass diffuser.
- Silicon gasket
- Cast aluminium base for mounting onto the wall.
- Cable entries for through-wiring of mains supply cable (max. 3 x 0.5 Sqmm)
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP 65
- CE - Conformity mark
- Prewired with LED driver and suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Residential, Building facade, commercial centres, Passages, Walkways.

Available Finish

Pure polyester powder coated Graphite grey only.

Accessory

A separate IP67 rated connector can be supplied for a secure connection to the network.

Light Distribution


Luminaire photometric data IES files for the light planning program DIALux can be downloaded in IES-format on the K-LITE web page www.klite.in.

Installation Recommendation

For latest technical information, Installation guidelines and product updates please refer to our website at www.klite.in




UP DOWN LIGHTERS

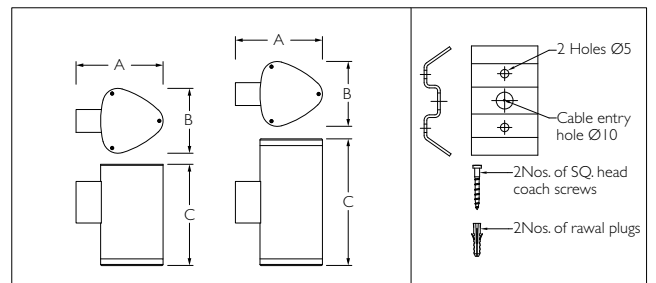

ID	Wattage	A	B	C
6984	6W LED N11	172	129	200
6985	2 x 6W LED N12	172	129	250

Note : N11 : Up / Down Lighter. N12 : Up Down Lighter.

 Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.