



# LED Batten

"LED Batten" surface mounted range of slim luminaires is a contemporary alternative to traditional batten solutions efficient, powerful and sleek linear light for creative interior lighting.

## Technical Specifications


- High efficiency diffuser for glare free, uniform light distribution.
- High PF constant current LED driver.
- Beam Angle 120°
- Protection class IP20
- Prewired with constant current LED driver and suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-1594-CCT ( Colour Temperature )
- Available CCT WW : Warm White (3000K), CW : Cool White (6500K).

## Product Benefits


- Efficient & effective light output with high light uniformity.
- Elegant & homogeneous designs.
- Attractive high quality housing & optics.
- Visual comfort with maximum energy saving.
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.

## Area of Application

Indoor general purpose lighting, Retail Sector; Residential, Super Markets, Commercial, School & Institution, Offices, Parking lots.

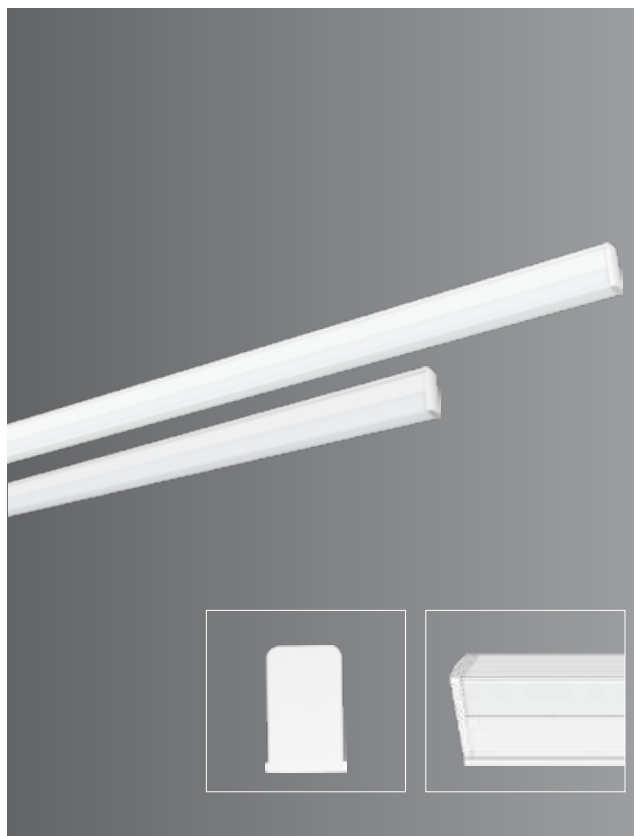

CONSUMER LUMINAIRES

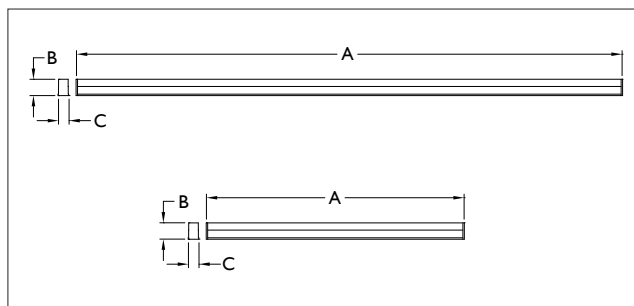

ID	Wattage	A	B	C
1594	9W LED	537	22	34
1595	20W LED	1137	22	34

Center Cord



The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)



**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.