



Tara - Recess Mounting

"Tara" recess mounted range of LED slim ceiling lights are a perfect fit for varied lighting applications. High lumen output, Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions.

Technical Specifications


- The housing is made of polycarbonate.
- High efficiency translucent diffuser for glare free, uniform light distribution.
- High lumen output, Integrated with SMT 2835 LEDs.
- High PF >0.90 constant current LED driver with 2.5kv built in surge and thermal protection.
- Cable entries for through-wiring of mains supply cable.
- Protection class IP30
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3307-CCT (Colour Temperature)
- Available CCT WW : Warm White (2800-3100K), CW : Cool White (6000-6800K), NW : Neutral White (3800-4300K).

Product Benefits

- Visual comfort with maximum energy saving
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

Area of Application

Lobbies & Foyers, Retail Sector, Corporate office, Airport & Hospitals, Residential & Educational premises, Commercial & Business Centers, Hospitality Industry, Interior traffic areas.

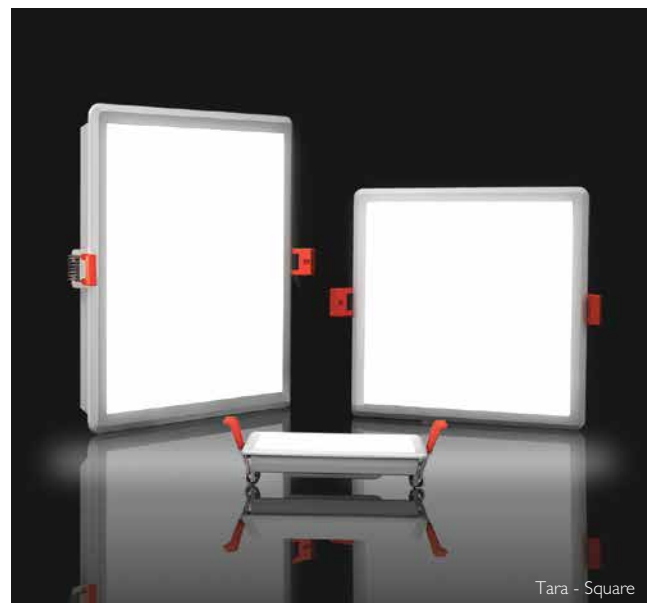

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in




Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.




Tara - Round

ID	Wattage	Cutout(mm)
3307	8W LED	Ø105

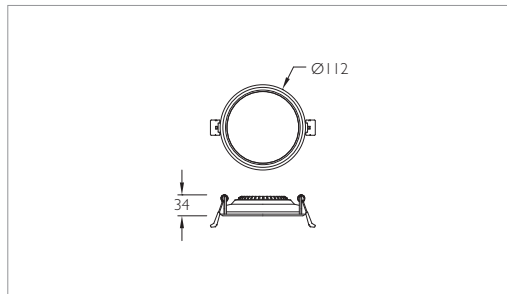


Tara - Round

ID	Wattage	Cutout(mm)
3308	15W LED	Ø155

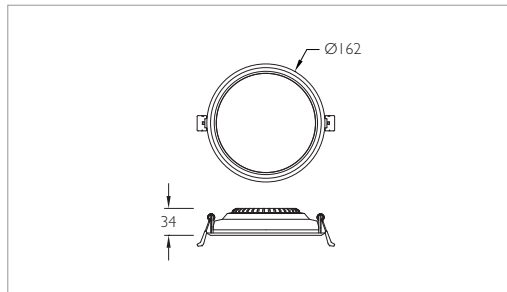


Tara - Round

ID	Wattage	Cutout(mm)
3309	22W LED	Ø205

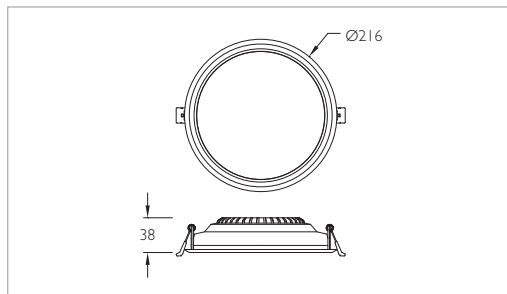


Tara - Square

ID	Wattage	Cutout(mm)
3310	8W LED	□105

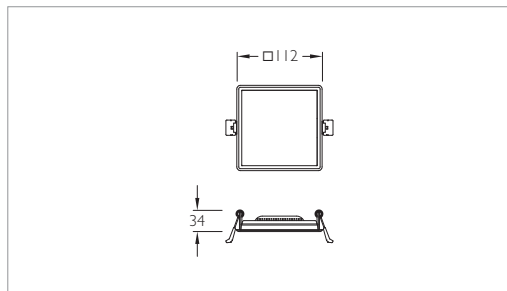

Tara - Square

ID	Wattage	Cutout(mm)
3311	15W LED	□155

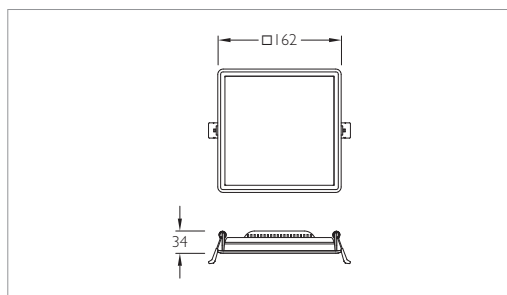

Tara - Square

ID	Wattage	Cutout(mm)
3312	22W LED	□205

