



# Ruby

"Ruby" recess mounted range of LED ceiling lights are a perfect fit for varied lighting applications. The die cast aluminium housing is ideal for better thermal management. High lumen output / Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions. Elegantly designed fixture under the green lighting, energy efficient category.

## Technical Specifications

- Luminaire made of die-cast aluminium which has excellent mechanical strength, aluminium heat sink for better thermal management.
- Adopting reflector which is with excellent optics effect and excellent spot light effect.
- The lamp can be positioned at various angles for the directional light throw.
- Cable entries for through-wiring of mains supply cable.
- Protection class IP20
- Suitable for operation on 240V, 50Hz single phase ac supply.

## Product Benefits


- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Replacement of existing CFL downlights with even better performance.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

## Area of Application

Lobbies & Foyers, Retail Sector, Traffic Areas, Corridors, Corporate, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers.

## Available Finish

White epoxy polyester powder coating.

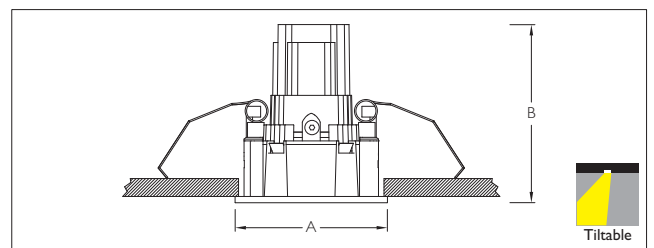

ID	Wattage	Beam Angle	A	B	Cutout(mm)
3296	8W LED	30°	Ø62	82	Ø55
3298	12W LED	23°	Ø85	99	Ø77
3299	25W LED	38°	Ø110	125	Ø102

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)



**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.