



Pullout

"Pullout" recess mounted range of LED down light, adjustable model. The extruded aluminium housing is ideal for better thermal management. Elegantly designed fixture under the green lighting, energy efficient category.

Technical Specifications

- Luminaire made of die-cast aluminium for better thermal management.
- The lamp along with driver is housed inside the extruded hollow circular aluminium pipe.
- Luminaire integrated with 15W LED.
- Adopting reflector which is with excellent optics effect and excellent spot light effect.
- Bracket to facilitate proper aiming of the luminaire at desired angle.
- Surface mounting on ceiling using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable
- Protection class IP 20
- Prewired with LED driver and suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3689-CCT (Colour Temperature)
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K).

Product Benefits


- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly.
- Quick & simple installation.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Retail Sector, Corporate, Malls, Restaurants, Receptions, Corridors, Commercial & Business Centers.

Available Finish

Epoxy polyester powder coated white.

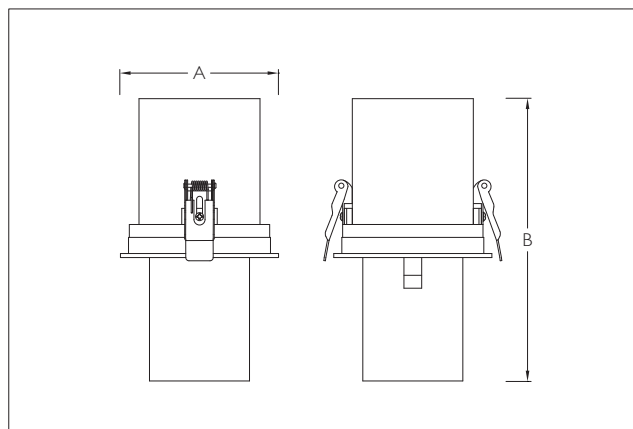

ID	Wattage	A	B	Cutout
3689	15W LED	Ø98	175	Ø90

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at www.klite.in



Important Note : To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.