



Vertical Light Bar

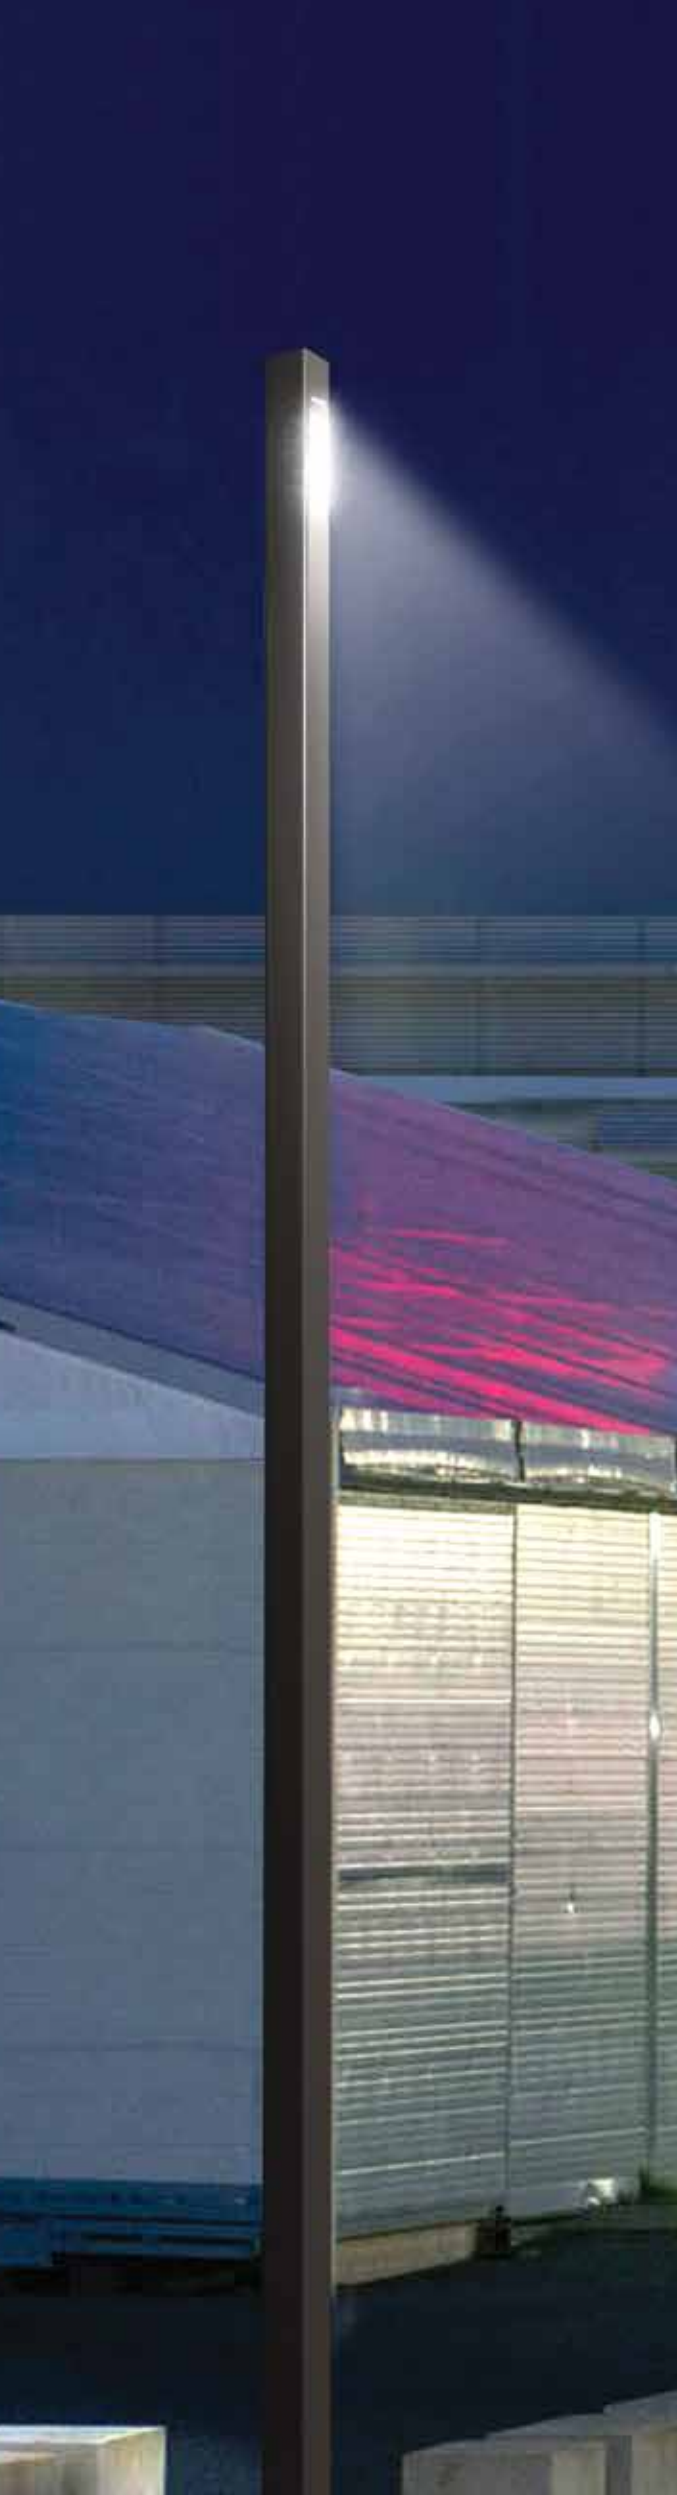

ID	Arm-Watts	Height
KP-4767	1 x 48W LED	4500
KP-4768	2 x 48W LED	4500

Mounting Details - Fig. 6

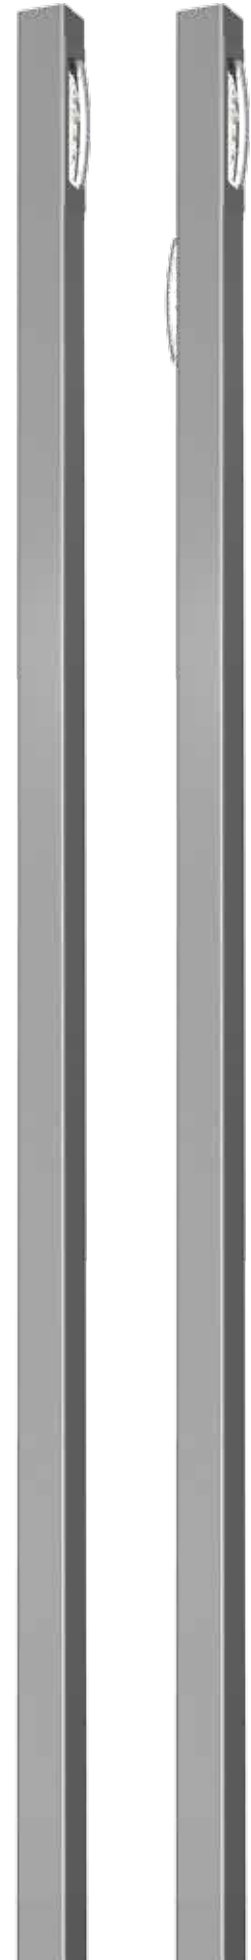

Specification :

LM80 certified LED brand	LUMILED
Input current	1,050 mA
Colour temperature	3000K / 4/5000K
Colour rendering index	80 / 70
Luminous flux (lm)	4,100 / 5,400
Power consumption (W)	48
Luminaire efficacy (lm/W)	85 / 113
Operating temperature (°C)	-40 to +50
Optics	TYPE III
Ingress protection	IP67
Optical cover	Polycarbonate
Certification	LM80 certified / RoHS / CE confirmed

Note :

1. Luminous flux and power consumption measurement allowance is $\pm 10\%$.
2. CRI allowance is ± 5 .

