TESTING REPORT



CENTRAL ELECTRONICS CENTRE

INDIAN INSTITUTE OF TECHNOLOGY MADRAS
CHENNAI - 600 036
INDIA

TERMS & CONDITIONS

- This report refers only to the particular item actually submitted for measurements.
- Results reported is valid at the time of and under for stated conditions of measurements.
- 3. CEC, IIT Madras shall not be liable for any change in the measurement data.
- The report is not to be used for any legal purposes and shall not be produced in a court of law.
- This report shall not be reproduced except in full, without the written approval from The Director, Indian Institute of Technology Madras.
- In case of any disputes, the decision on Indian Institute of Technology Madras shall be final binding.



केन्द्रीय इलेक्ट्रॉनिकी केंद्र CENTRAL ELECTRONICS CENTRE भारतीय प्रौद्योगिकी संस्थान मद्रास INDIAN INSTITUTE OF TECHNOLOGY MADRAS चेक्रै / Chennal 600 036

Issue No: 02, Version No: 02 Issue Date: 13-08-2016 MSP-TST-FOR-004

REPORT NO:140517-CON-TST DATE: 17-05-2017	PAGE NO:10F 4
--	---------------

1.1 Test Registration No.

: 140517-CON-TST

1.2 Test Venue

: Testing Laboratory, CEC, IIT Madras.

1.3 Name & Address of the Customer

: K-LITE Industries,

D-10, A.I.E, Chennai-600 058

1.4 Description of the equipment under test

: LED Luminaire

Model: Pelican Fort 2 x 60 - Secondary Optics

Data sheet Attached

1.5 Condition on receipt

: Good

1.6 No. of Test samples

: One

1.7 Sampling Plan (Wherever applicable)

: Not Applicable

.8 Date of receiving the equipment

: 15-05-2017

1.9 Date of testing

: 17-05-2017

1.10 Customer's Requirements

: Performance Evaluation

1.11 Test Method / Standard Used

: IES LM79-08

1.12 Deviations if any

: Nil

2.0 Test Instruments used & Traceability details: (Equipments used are traceable to national standards)

Sl. No.	Equipment used	Calibration Report Reference	Valid upto
1	Integrating Sphere of 4π geometry & 2m dia with Spectroradiometer CDS2100	LabSphere-OM-04033-002 & NPL/16031409/5.04/C53-56	19-05-2018
2	Power Analyzer-Yokagawa WT500	ETDC(CN)/2016/49155	05-09-2017

9. Autho

TESTED BY

AUTHORISED SIGNATORY

दूरभाष/ Phone: 044-2257/ 4946 / 45 फैक्स / Fax: 044-2257 4986 ई-मेल / E-mail: headcec@iitm.ac.in



केन्द्रीय इलेक्ट्रॉनिकी केंद्र CENTRAL ELECTRONICS CENTRE भारतीय प्रौद्योगिकी संस्थान मद्रास INDIAN INSTITUTE OF TECHNOLOGY MADRAS चेन्नै / Chennai 600 036

MSP-TST-FOR-004

The same of the sa		
REPORT NO:140517-CON-TST	TEST RESULTS	PAGE NO.: 2 OF 4
DATE: 17-05-2017		

Laboratory ambient condition: Temperature: 25 ± 2.5 °C

Relative Humidity: 35% - 65%

Test conditions:

Orientation (burning position): Zero degree inclination to horizontal

Bandwidth of Spectroradiometer: 350 nm to 1050 nm, measurements taken at 1 nm interval

Stabilization Time: 30 min

S.No	Clause No. ,Test Description	Observation
1	Cl.8-Electrical Characterisitics 1. Input RMS AC Voltage 2. Input RMS AC Current 3. Input AC Power 4. Input voltage Frequency 5. Power factor 6. Input current THD	240.63 V 520.8 mA 120.47 W 50.0 Hz 0.9614 11.44%
2	Cl.9-Photometric test -Total Luminous Flux	17100 lumens
3	Cl.11-Luminous Efficacy	141.94 lm/W
4	Cl.12-Colour characteristics 1. Correlated Colour Temperature (CCT) 2. Chromaticity coordinate -X 3. Chromaticity coordinate-Y 4. Colour Rendering Index Average(CRI)	5330 K 0.3362 0.3410 77.33

G.A.H.E.

AUTHORISED SIGNATORY


house houses of Drings as 7 lines 4-4 - 600 036 / Chemist - 600 036



केन्द्रीय इलेक्ट्रॉनिकी केंद्र CENTRAL ELECTRONICS CENTRE भारतीय प्रौद्योगिकी संस्थान मद्रास INDIAN INSTITUTE OF TECHNOLOGY MADRAS चेन्नै / Chennai 600 036

MSP-TST-FOR-004

		ACCOUNTS AND ACCOUNTS AND ACCOUNTS
REPORT NO:140517-CON-TST	TEST RESULT	PAGE NO.: 3 OF 4
DATE: 17-05-2017		

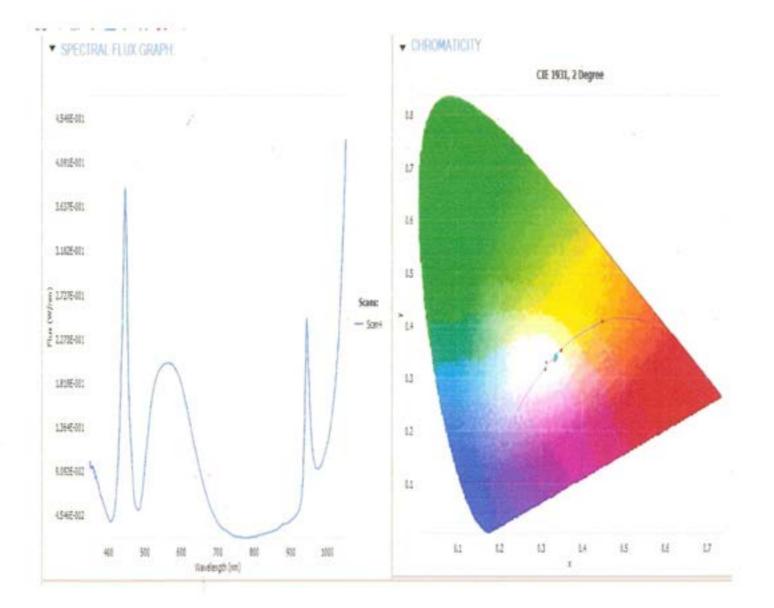

G. Antha TESTED BY

दूरभाष/ Phone: 044-2257/ 4946 / 45

AUTHORISED SIGNATORY

ALL PAC THURSDAY C. H. MENON

दूरभाष/ Phone: 044-2257/ 4946 / 45 फिस्स/ Fax: 044-2257 4986 ई-मेल / E-mail: headcec@iitm.ac.in

फेक्स / Fax: 044-2257 4986 ई-मेल / E-mail: headcec@iitm.ac.in



केन्द्रीय इलेक्ट्रॉनिकी केंद्र CENTRAL ELECTRONICS CENTRE भारतीय प्रौद्योगिकी संस्थान मदास INDIAN INSTITUTE OF TECHNOLOGY MADRAS चेन्नै / Chennai 600 036

MSP-TST-FOR-004

REPORT NO:140517-CON-TST PAGE NO.: 4 OF 4 TERMS & CONDITIONS DATE: 17-05-2017

- This report refers only to the particular item actually submitted for testing.
- Results reported are valid at the time of and under the stated conditions of testing.
- CEC, IIT, Madras shall not be liable for any change in data.
- The report is not to be used for any legal purposes and shall not be produced in a court of law.
- This report shall not be reproduced except in full, without the written approval from the IIT, Madras.
- In case of any disputes, the decision of the IIT, Madras shall be final and binding.
- If any anomaly is found in the test report, it shall be brought to the notice of the Head, CEC, within 45 days from the date of the report so as to review and amend the report, wherever necessary and send the amendments to the client, after the receipt of the corresponding original report.

TESTED BY

AUTHORISED SIGNATORY





India's Lighting Company

Pelican Fort - 2 x 60W - Secondary Optics

Pelican Fort Street Light is a special purpose outdoor luminaire, integral model, totally weather proof aesthetically contoured. Improved long lasting protection against ingress of dust / moisture / insects inside optical compartment with top opening facility for maintenance, including relamping. Streamlined profile for lesser aerodynamic resistance.

Technical Specifications

- Luminaire comprises of specially contoured spun aluminium body featuring high strength and anti corrosion.
- Suitable for mounting to internally threaded pipe of designation
- Cable entries for through-wiring of mains supply cable (max. 3 x 2.5 Sgmm)
- Integral power supply
- Earth connection
- Safety class I
- Protection class: IP65 for luminaire, IP68 for LED module, IP67 for driver
- C Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

Product Benefits

- . Top cover retained by hinge for easy maintenance and held in closed position by spring loaded latch.
- Functionally versatile, strong and stable with sound engineering.
- Corrosion resistant and easy maintanance.
- · Quick installation and low assembly costs.

Area of Application

Illuminating parks, Gardens, commercial complex, streets & office

Available Finish

Pure polyester powder coated Traffic Grey / Black.

Test Report NO: 140517 - CON-TST







K-LITE INDUSTRIES

D-10, Ambattur Industrial Estate, Chennai - 600 058. Tel : 26257710, 48581950. Fax: 26257866 Cell:95000 79797,95000 85511. Email:info@kite.in Website:www.kite.in