

# Glider Asymmetric



Glider Asymmetric luminaire with asymmetrical light distribution providing indirect lighting outstanding visual appeal and precision optical system with very low glare rating.

## Technical Specifications

- Luminaire made of extruded aluminium alloy (grade 6063) with die-cast aluminium components and non corrosive SS fasteners
- Reflector system made of aluminium sheet (powder coated white for high reflection).
- Silicon gasket
- GI mounting plate with an anchorage unit made out of hot dip galvanised steel for extra guarantee against corrosion. Luminaire can be aligned on the mounting plate around 360°.
- Cable entries for through-wiring of mains supply cable.
- Integral power supply
- Earth connection
- Safety class I
- Protection class IP65
- CE - Conformity mark
- Suitable for operation on 240V, 50Hz single phase ac supply.

## Product Benefits



- Practical . Elegant . Efficient
- Timeless modern design options.
- Easy to maintain, robust and durable construction.
- Soft diffused lighting protects pedestrians from glare and provides distinctive lighting with exceptional visual comfort.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

## Area of Application

Suitable for Private & Public areas, Illuminating Driveways, Pathways, Boulevard's, Entrances, Squares & Gardens.

## Available Finish

Pure polyester powder coated Graphite grey / Black.

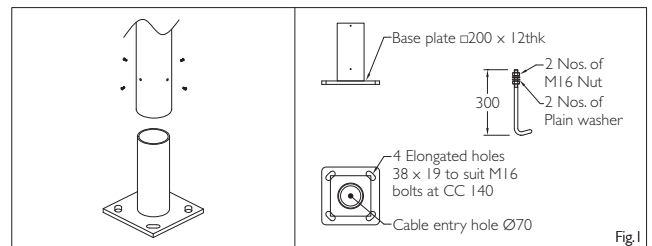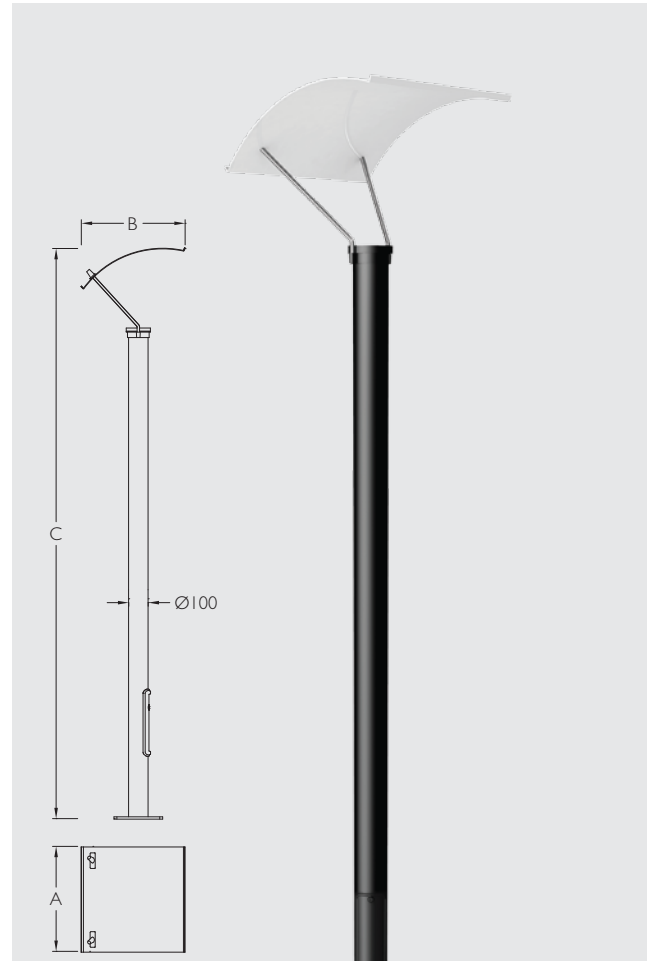

ID	Wattage	A	B	C	Mounting
6669	70W MH G12	540	535	2930	Fig. I
7026	20W LED	540	535	2930	Fig. I

The luminous flux and the connected wattage quoted might change as a result of technical progress. For the latest technical information, Installation guidelines and product updates with LED service life please refer to the website at [www.klite.in](http://www.klite.in)



**Important Note :** To ensure proper installation, kindly translate / communicate the installation instructions to a qualified electrician in their respective local language.